


	1	2	3	4	5	6	7	8	9		
A										A	
B										B	
C										C	
D										D	
E										E	
F										F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4	SCALE:---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	PCB Fuse Holder For Fuse 5.2x20mm THIRD ANGLE PROJECTION 		RHTEY095	G
	1	2	3	4	5	6	7	8	9		

24

5.6

24

10.8

21.6

9.4

7.8

9.4

4.4

1.6

STRUCTURE:

Colour:Black,Green

Housing:Flame-retarded plastic



Pole: Tinning brass

Suitable fuse: $\varnothing 5.2 \times 20\text{mm}$

ELECTRONIC CHARACTER:

Rating current: 6.3A

Rating voltage: 250V AC


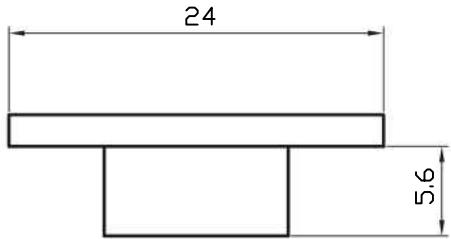


STRUCTURE:

Colour:Black,Green

Housing:Flame-retarded plastic

Pole: Tinning brass

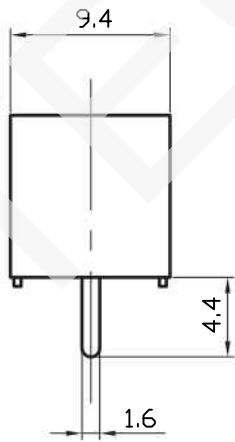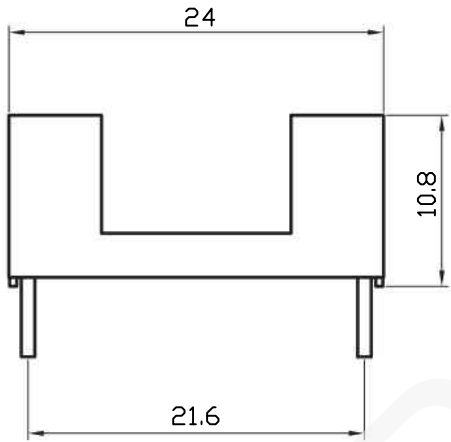

Suitable fuse: $\varnothing$ 5.2 x 20mm

ELECTRONIC CHARACTER:

Rating current: 6.3A

Rating voltage: 250V AC