




Material:
 Body:PC+ABS
 Contact:Brass, Tin Plated
 Electrical Characteristics:
 Fuse 5×20mm
 Pitch 22.4mm
 Rated Load:5A 250V.AC
 Contact Resistance: ≤5mΩ
 Insulation Resistance:≥500MΩ
 Withstand Voltage:AC 1000V(50Hz)/Min

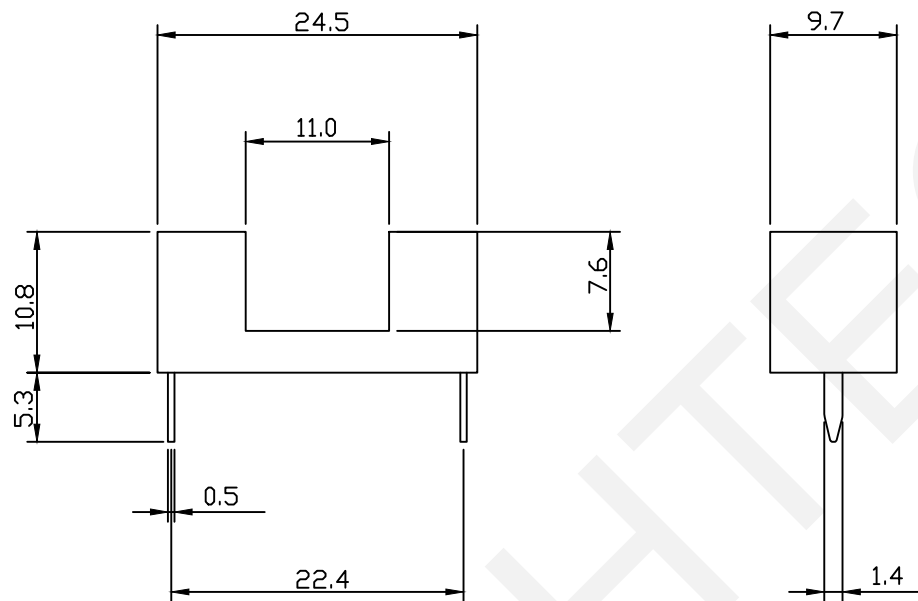

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

PCB type Fuse Holders

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



RHTEY096

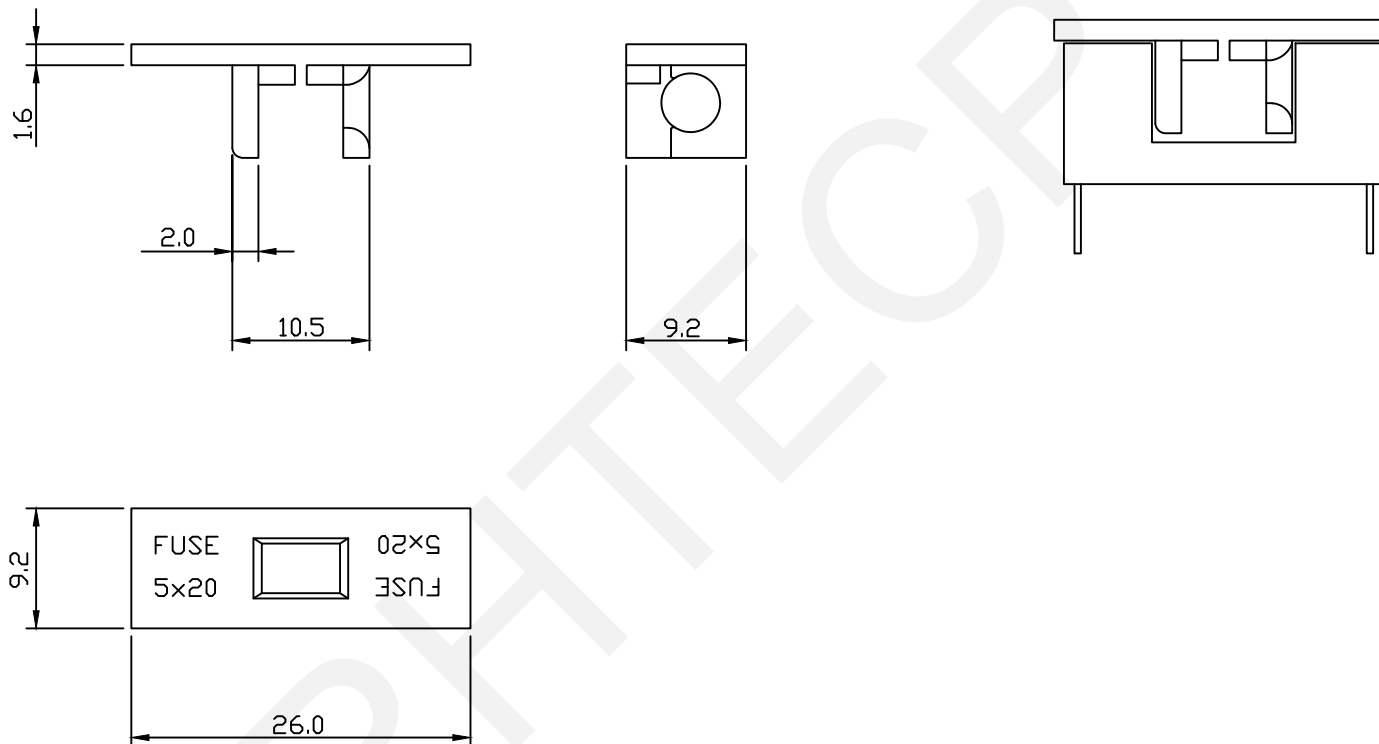

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

PCB type Fuse Holders cover	
THIRD ANGLE PROJECTION	RHTEY096