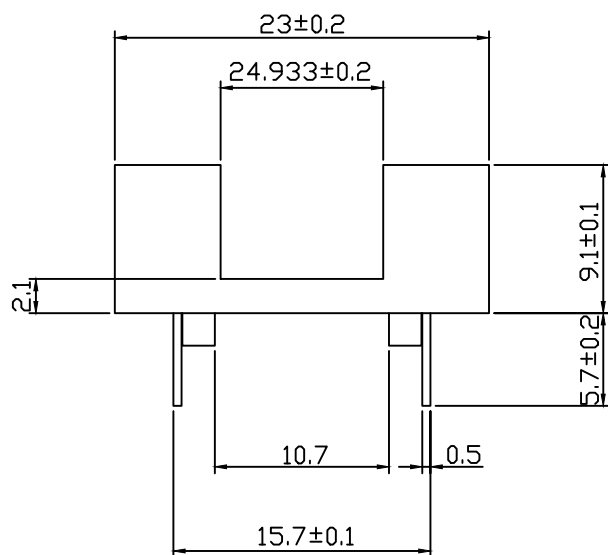


Material and other:
 Insulator: Flame-Retarded Plastic
 Contact: Brass, Tin Plated
 Rated voltage: 250V.AC
 Rated current: 6.3A
 Contact Resistance: 5mΩ MAX
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: AC 1000V(50HZ)1 minute

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

PCB Fuse Holder

THIRD ANGLE PROJECTION



RHTEY098