

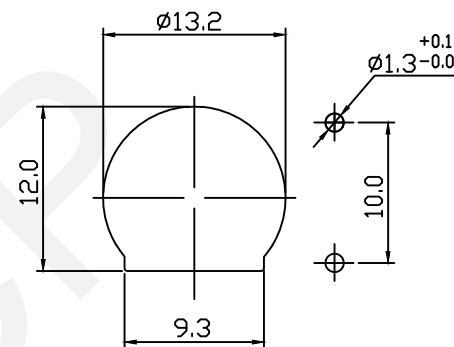
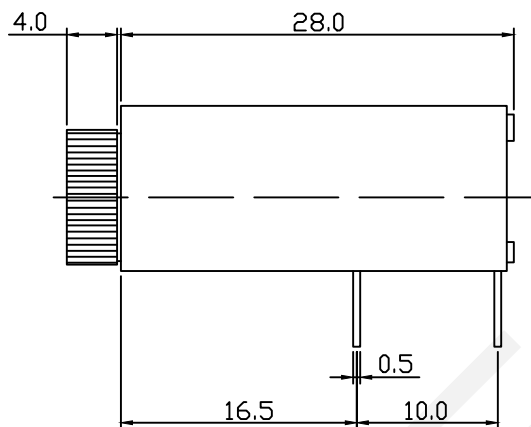
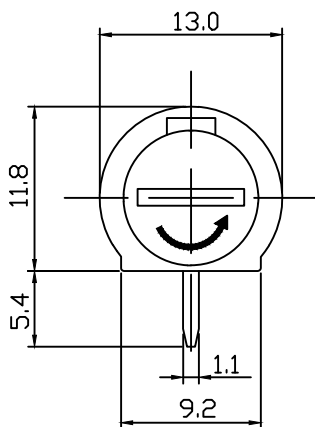


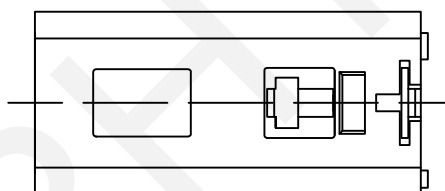

Recommend Mounting Holes

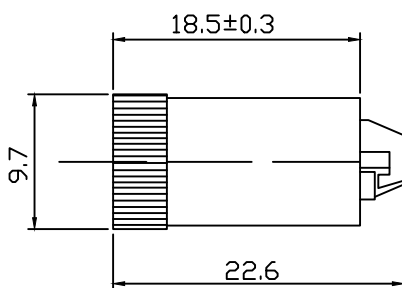

Material

Plastic Material For Body And Cover PBT

Insulating Body:

Flame Retarding UL94V-0 Thermoplastic Material

Contact: Nickel Plated Copper Alloy

Electrical:

Rated Voltage: 250V

Rated Current: 10A

Insulation Resistance At 500V DC: 100MΩ Min

Contact Resistance: 5mΩ At 1A DC

Dielectric Strength For 60 Seconds: AC 1000V Min

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

PCB Fuse Holder For Fuse 5.2×20mm

THIRD ANGLE PROJECTION



RHTEY10