


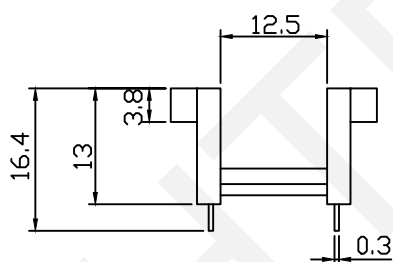

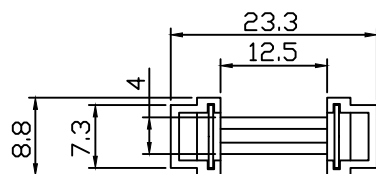


Mounting Holes

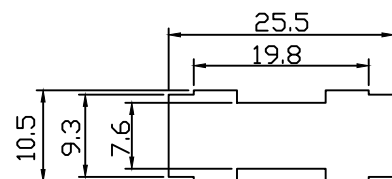

Materials:

Insulator: Flame Resisting ABS

Contact: Brass, Tin Plated

Electrical:

Rating Current: 5A

Rating Voltage: 250V AC

Contact Resistance: 5mΩ MAX

Insulation Resistance: 500MΩ Min

Withstand Voltage: AC 1000V(50Hz)/1 Min

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

PCB Fuse Holder

For Fuse 5.2x20mm Pitch 14mm

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTEY51

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

