

Material:

Housing:PBT,UL rated 94 V2 min

Bayonet:PBT,UL rated 94 V2 min

Terminal:Brass,silver plated

Nut:Brass,Ni plated

Electrical:

Rating: 10A 250VAC(UL,CUL)

Adaptation Fuse:Ø5.0x20mm




Cap:Bayonet type

Panel thickness:4.5mm Max

Operating Temperature:-10°C~+70°C

Fuse holder for overload protection

Screw-in mounting

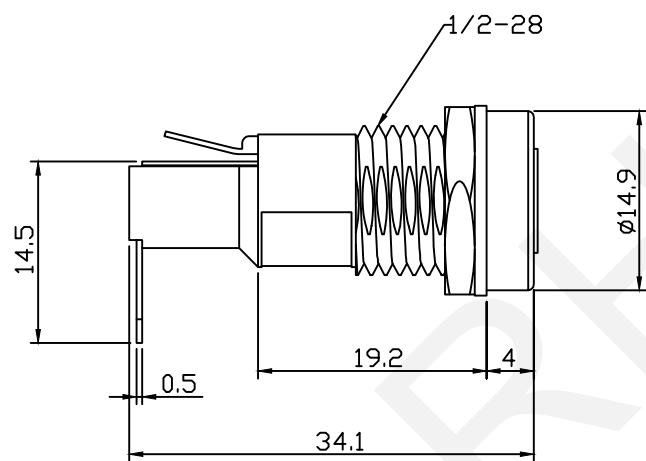

CUT-OUT



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pane Fuse Holder

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTEYH101

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN