



ø6.35x25 Glass Tube Fuse Series

RHTEY063/064 Inner weld ø6.35x25 Glass Tube Fuse(Fast Blow)Series

RHTEY064




RHTEY063

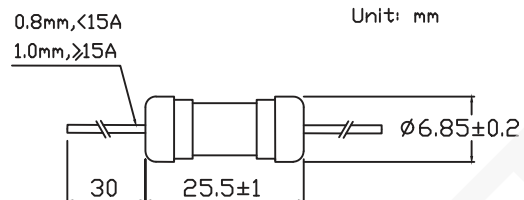

Unit: mm

I-T CHARACTERISTICS CURVE

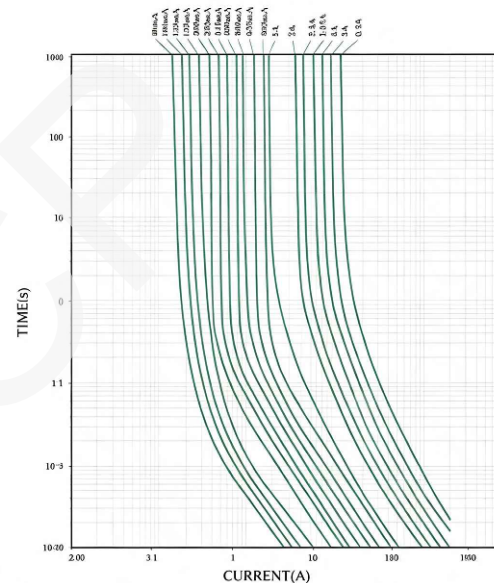

ORDER INFORMATION

Product NO.: RHTEY063-XXXX

Lead Type: 063=With Lead 064=No Lead

Rated Current

ELECTRICAL CHARACTERISTICS

Rating	2.1 In		2.75 In		4 In		10 In
	Max	Min	Max	Min	Max	Max	Max
≥50mA~100mA	20s	20ms	200ms	1ms	30ms	5ms	
>100mA~10A	20s	20ms	1500ms	8ms	400ms	80ms	



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

FUSE GLASS TUBE 25MM ROHS

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTEY063&RHTEY064

±0.12


±0.15

±0.3

±0.5

APPR BY ZHAN

1		2		3		4		5		6		7		8		9	
A																A	
B																B	
C																C	
D																D	
E																E	
F																F	
G																G	

 NINGBO RHT ELECTRONIC CO.,LTD				UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN		FUSE GLASS TUBE 25MM ROHS			
0~3		3~18		18~50		50~120		CHK'D BY FENG		THIRD ANGLE PROJECTION			
±0.12		±0.15		±0.3		±0.5		APPR BY ZHAN					

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---