


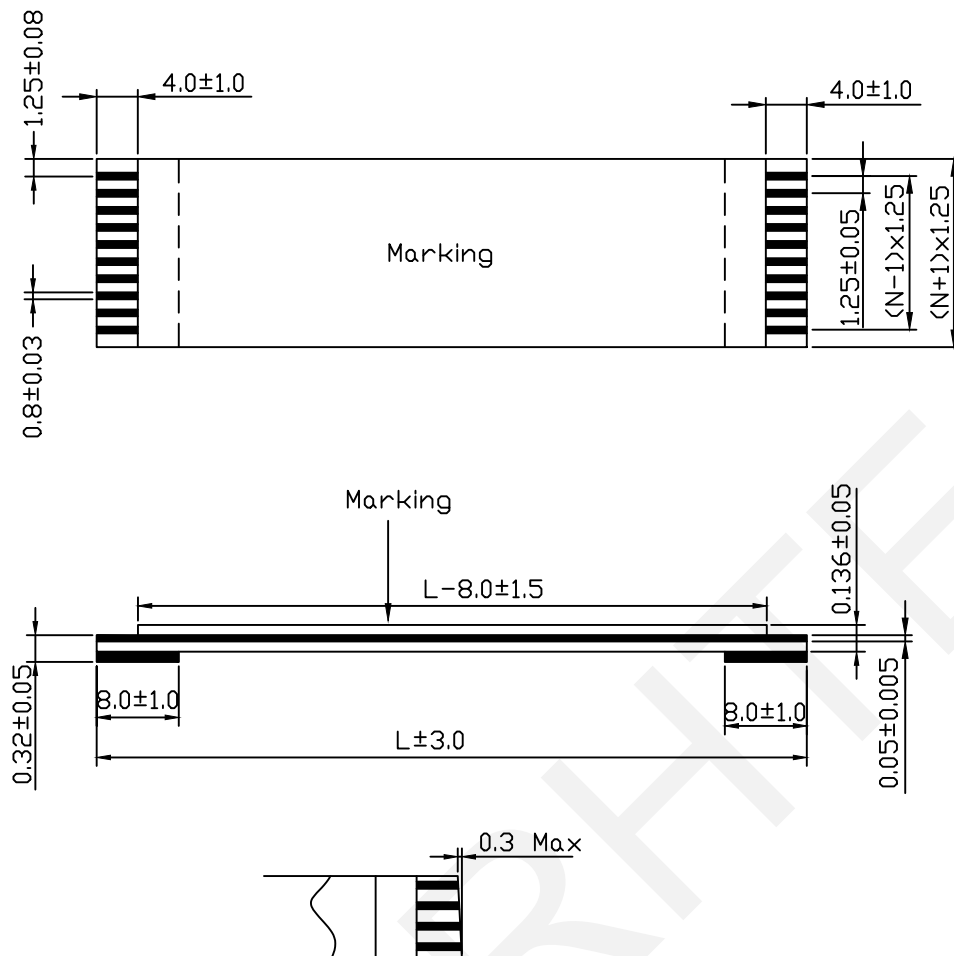

Note

- 1-100%Testes No Short Or Break Circuit
- 2-Storage condition:
Temp:15°C~25°C
Humidity:30~ 60RH%
- 3-Conductor:0.05x0.8mm
- 4-Supporting Tap:0.225mm PET,BLUE
- 5-Insulation:0.043mm PET,White

Order Information

RE-CAB-FFC-1.25-XXP-LXXX A 4/8

1.25: Pitch 1.25mm

XXP: Number Of Conductor

XXX: Length 050=50mm 150=150mm

A: Type

4/8: Strip Length/Supporting Tape Length



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 1.25mm FFC Cable A Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RE-CAB-FFC-1.25-XXP-LXXXA4/8


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN

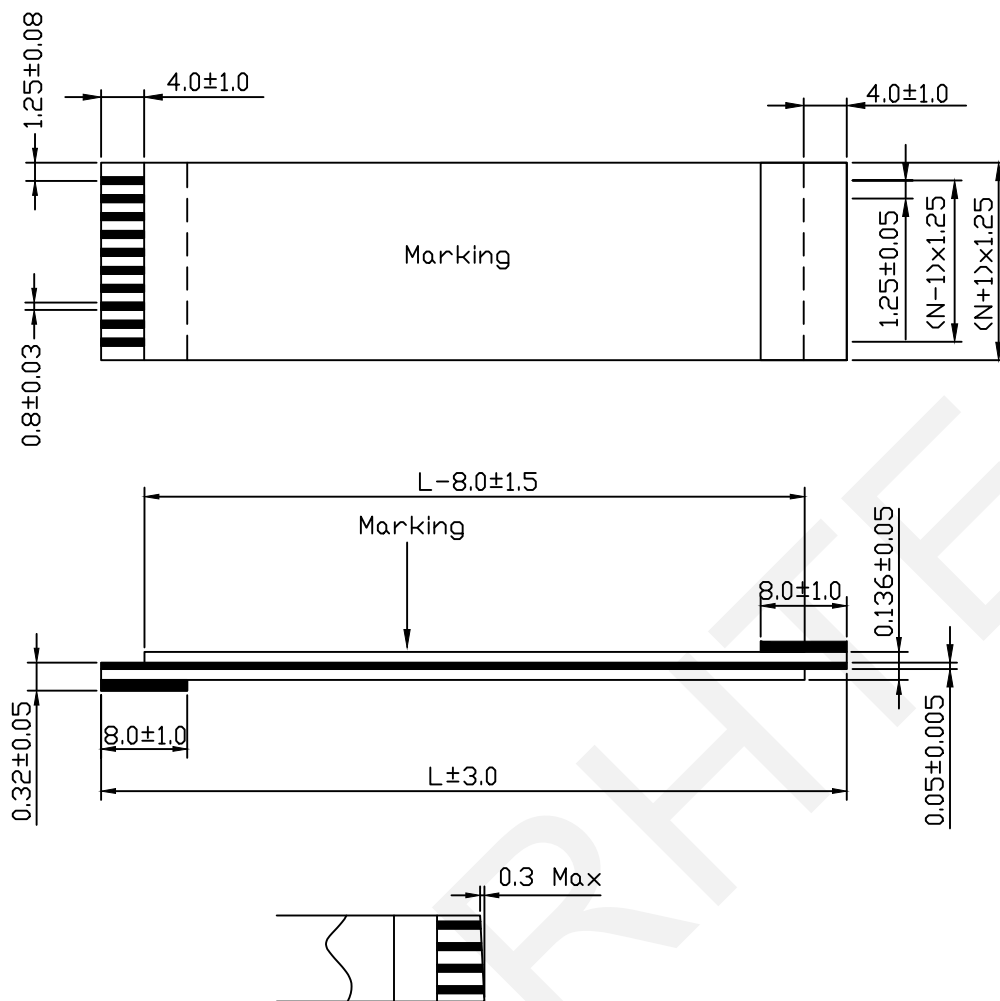

Note

- 1-100%Testes No Short $\square$ t Break Circult
- 2-Storage condition:
Temp:15°C~25°C
Humidity:30~ 60RH%
- 3-Conductor:0.05x0.8mm
- 4-Supporting Tapc:0.225mm PET,BLUE
- 5-Insulation:0.043mm PET,White

Order Information


RE-CAB-FFC-1.25-XXP-LXXX B 4/8

- 1.25: Pitch 1.25mm
- XXP: Number $\square$ f Conductor
- XXX: Length 050=50mm 150=150mm
- B: Type
- 4/8: Strip Length/Supporting Tape Length



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Pitch 1.25mm FFC Cable B Type	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RE-CAB-FFC-1.25-XXP-LXXXB4/8
± 0.12	± 0.15	± 0.3	± 0.5	APPR BY ZHAN	

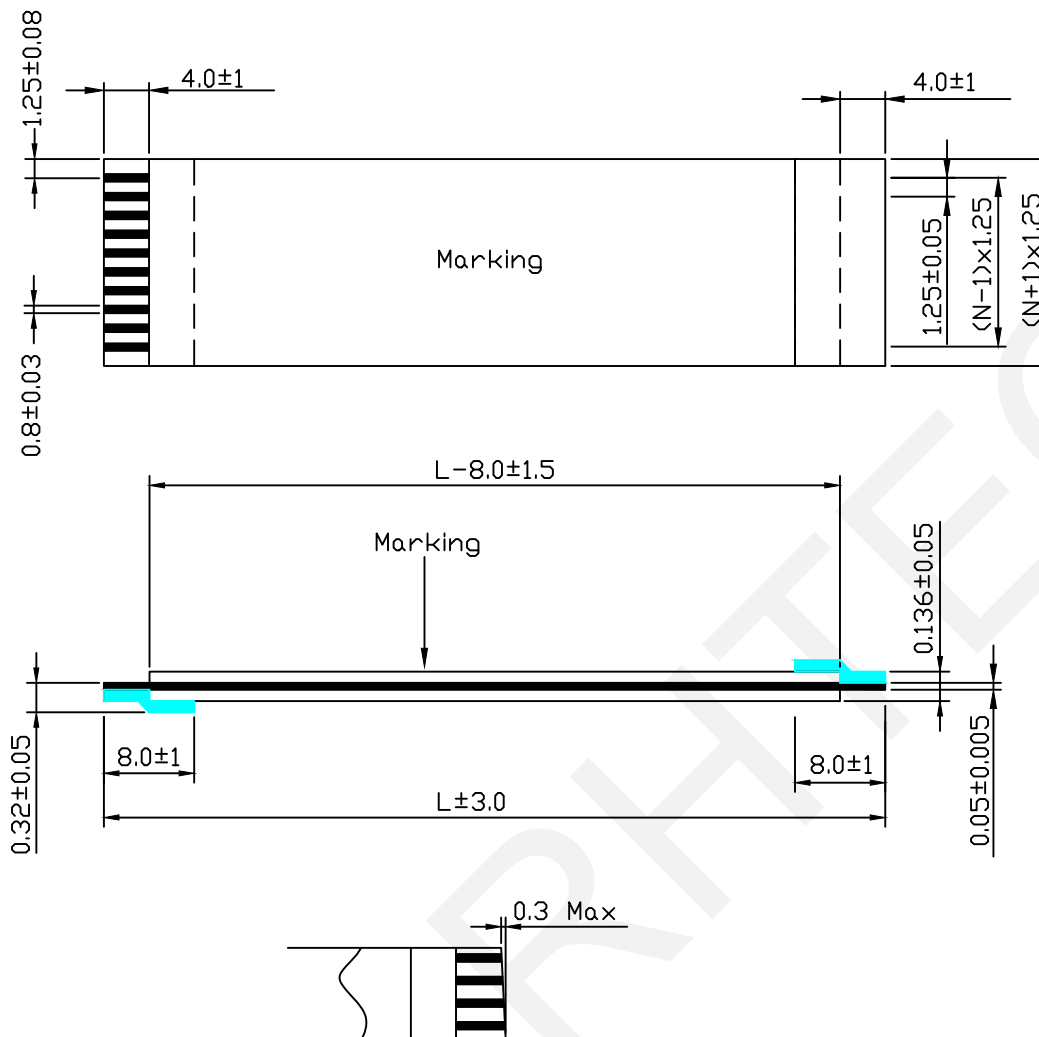

Note

1-100%Testes No Short Or Break Circult

2-Storage condition:

Temp:15°C~25°C

Humidity:30~ 60RH%

3-Conductor:0.05x0.8mm

4-Supporting Tapc:0.225mm PET,BLUE

5-Insulation:0.043mm PET,White

Order Information

RE-CAB-FFC-1.25-XXP-LXXX D 4/8

1.25: Pitch 1.25mm

XXP: Number Of Conductor

XXX: Length 050=50mm 150=150mm

D: Type

4/8: Strip Length/Supporting Tape Length

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 1.25mm FFC Cable D Type

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RE-CAB-FFC-1.25-XXP-LXXXD4/8

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN