



Glass Tube Fuse (Slow Blow) Series

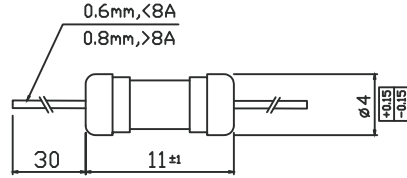

I-T CHARACTERISTICS CURVE

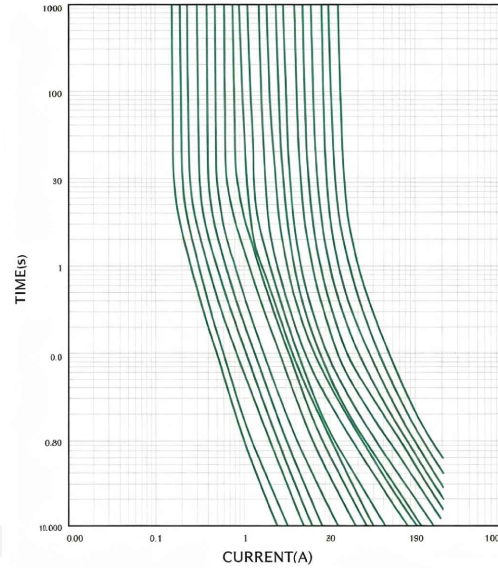

ELECTRICAL CHARACTERISTICS

RATING		BLOWINGTIME
2.1In	Max	2Min
	Min	400ms
2.75In	Max	10sec
	Min	150ms
4In	Max	3sec
	Min	20ms
10In	Max	150sec
	Min	

ORDER INFORMATION

Product NO.: RHTEY010-XXXX

Lead Type010=Ø4x11

Rated Current

Part No.	Rated Current	Mv Voltage Drop	Rated Voltage
RHTEY010-0100	100mA	1750	125V/250V
RHTEY010-0125	125mA	1500	125V/250V
RHTEY010-0150	150mA	1500	125V/250V
RHTEY010-0160	160mA	1500	125V/250V
RHTEY010-0200	200mA	1500	125V/250V
RHTEY010-0250	250mA	1000	125V/250V
RHTEY010-0300	300mA	1000	125V/250V
RHTEY010-0400	400mA	1000	125V/250V
RHTEY010-0500	500mA	1000	125V/250V
RHTEY010-0600	600mA	900	125V/250V
RHTEY010-0700	700mA	500	125V/250V
RHTEY010-0750	750mA	500	125V/250V
RHTEY010-0800	800mA	275	125V/250V
RHTEY010-1000	1A	275	125V/250V
RHTEY010-1200	1.2A	275	125V/250V
RHTEY010-1250	1.25A	275	125V/250V
RHTEY010-1500	1.5A	275	125V/250V
RHTEY010-1600	1.6A	275	125V/250V
RHTEY010-1800	1.8A	275	125V/250V
RHTEY010-2000	2A	250	125V/250V
RHTEY010-2500	2.5A	250	125V/250V
RHTEY010-3000	3A	250	125V/250V
RHTEY010-3150	3.15A	250	125V/250V
RHTEY010-3500	3.5A	250	125V/250V
RHTEY010-4000	4A	225	125V/250V
RHTEY010-5000	5A	225	125V/250V
RHTEY010-6000	6A	225	125V/250V
RHTEY010-6300	6.3A	200	125V/250V
RHTEY010-7000	7A	200	125V/250V
RHTEY010-8000	8A	200	125V/250V
RHTEY010-10000	10A	200	125V/250V
RHTEY010-12000	12A	1800	125V/250V
RHTEY010-15000	15A	1800	125V/250V

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

3.6x10 Glass Tube Fuse Series

THIRD ANGLE PROJECTION



RHTEY010