




	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	UL2678 Flat Ribbon Cable Pitch 0.635mm THIRD ANGLE PROJECTION  RHTQYAB-0635-FC-XX-X		
	1	2	3	4	5	6	7	8	9

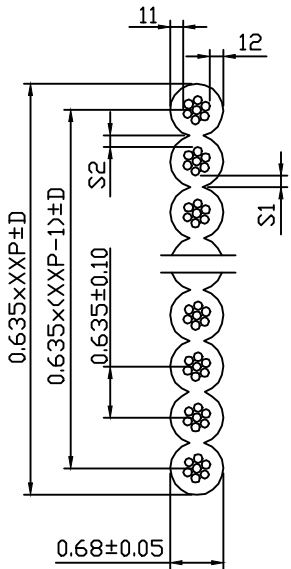

Eccentricity: $|S1-S2| \leq 0.05, |I1-I2| \leq 0.05$

XX≤30P, D=0.2 ≤4P,Not Printing
XX≥31P, D=0.25 >4P,Printing
XX≥60P, D=0.35
XX≥61P, D=0.40

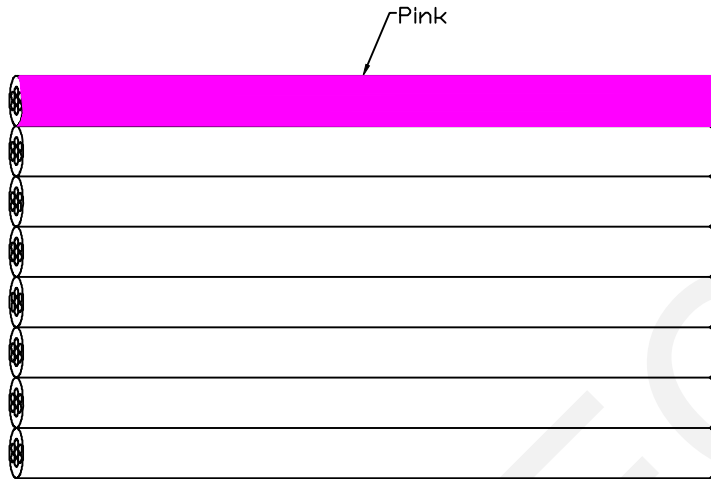

Order Information:

RHTQYAB-0635-FC-96-2

Pitch:0.635mm

Flat Ribbon Cable

Pin Number:

Standard PUT-UP:

1-30.5M/Roll 3-153M/Roll

2-76.2M/Roll 4-305M/Roll.....

Conductor
Size:30AWG
Construction:7/0.10±0.005mm TS
Material:Copper,Tinned
Conductor Diameter:0.30mm±0.005

Insulation:
Minimum Thickness:0.15mm
Average Thickness:0.18mm
Concentricity:≥70%
Color:Gray
Diameter:0.68±0.05mm
Material:105°C PVC
Flame Test Of Cable:VW-1
Marking:  AWM 2678 30AWG 105°C 150V VW-1
E332441 YAOBO C  AWMIA 105°C 150V FTI

Electric:
Rated Voltage:150 V
Rated TEMP:-20°C~105°C
Voltage-Withstand:1500 V/One Minute
Spark Test:1500 V/0.15 Sec Min
COND.Resistance: 38ΩMax/KM 20°C
INSU. Resistance:0.75MΩMin/KM 20°C
Tensile Strength:≥1500PSI(New),≥75%(Old)
Elongation:≥100%(New),≥65%(Old)