





	1	2	3	4	5	6	7	8	9	
A										A
B										B
C										C
D										D
E										E
F										F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	UL 2678 Flat Ribbon Cable THIRD ANGLE PROJECTION  RHTQYAB-100-FC-XX-X/28			G
	1	2	3	4	5	6	7	8	9	

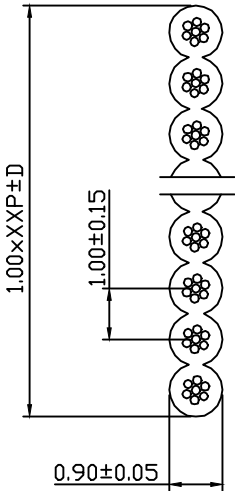

XX≤30P, D=0.2
XX≥31P, D=0.25
XX≥60P, D=0.35

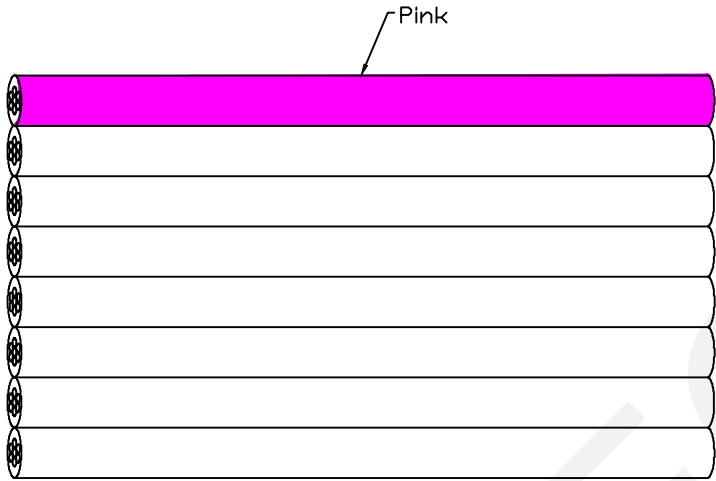

Order Information:
RHTQYAB-100-FC-08-4/28



Pitch:0.635mm
Flat Ribbon Cable
Pin Number:
Standard PUT-UP:
1-30.5M/Roll 3-153M/Roll
2-76.2M/Roll 4-305M/Roll.....

Conductor
Size:28AWG
Construction:7/0.127±0.005mm
Material:Copper,Tinned
Conductor Diameter:0.39mm±0.05

Insulation:
Minimum Thickness:0.18mm
Average Thickness:0.26mm
Color:Gray
Diameter:0.90±0.05mm
Material:105°C PVC

Marking: AWM 2651 28AWG 105°C 300V VW-1
E332441 YAQBD C AWM I A 105°C 300V FTI

Electric:
Rated Voltage:300 V
Rated TEMP:-20°C~105°C
Voltage-Withstand:2500 V/One Minute
Spark Test:3000 V/0.15 Sec Min
COND.Resistance: 237ΩMax/KM 20°C
INSU. Resistance:0.75MΩMin/KM 20°C
Tensile Strength:≥1500PSI(New),≥75%(Old)
Elongation:≥100%(New),≥65%(Old)