


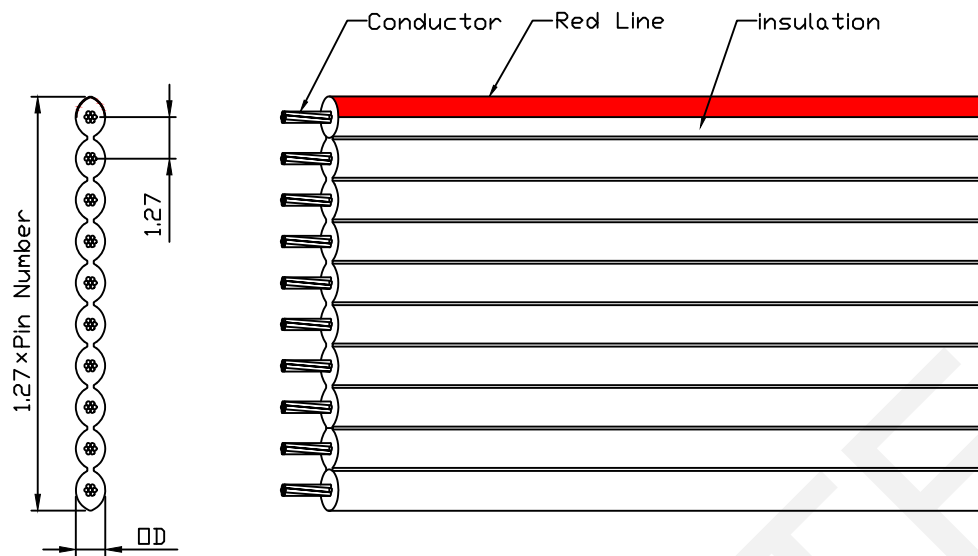

Conductor				Conductor		Conductor resistance Max. at 20°C,DC
AWG	Construction mm	DIA. mm	Pin Number	Thickness mm	OD mm	
30	7/0.10	0.30	4~64	0.26	0.85	376.96
28	7/0.12	0.39	4~64	0.26	0.90	237.25
26	7/0.16	0.49	4~64	0.26	1.00	148.94

Product Description:

UL STYLE: UL2651
 Rate temperature : 105℃
 Rate voltage : 300V
 Flame test : VW-1 & CSA FT1,FT2
 Conductor: 26~30AWG ,Tinned Copper
 Insulation : PVC, Color: Gray

ELECTRONIC CHARACTERISTICS:

Spark test : 2500V
 Dielectric strength test : 2KV in 1 minute Min.
 Insulation resistance : 127MΩ/km Min.

Order Information:

RHTQYAB-127-FC-XX-X/XX

Pitch:1.27mm
 FC: Flat Ribbon Cable
 Pin Number: 04P 08P 10P 12P 14P
 16P 20P 24P 26P 30P
 34P 40P 50P 60P 64P
 Standard PUT-UP: _____
 1- 30.5M/Roll 3-153M/Roll (<40P)
 2-76.5M/Roll 4-305M/Roll (<8P)
 Conductor AWG: _____
 None - 30AWG(7/0.10TS)
 28 - 28AWG(7/0.12TS)
 26 - 26AWG(7/0.16TS)



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	1.27mm Pitch UL2651 Flat Ribbon Cable	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RHTQYAB-127-FC-XX-X/XX
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	