


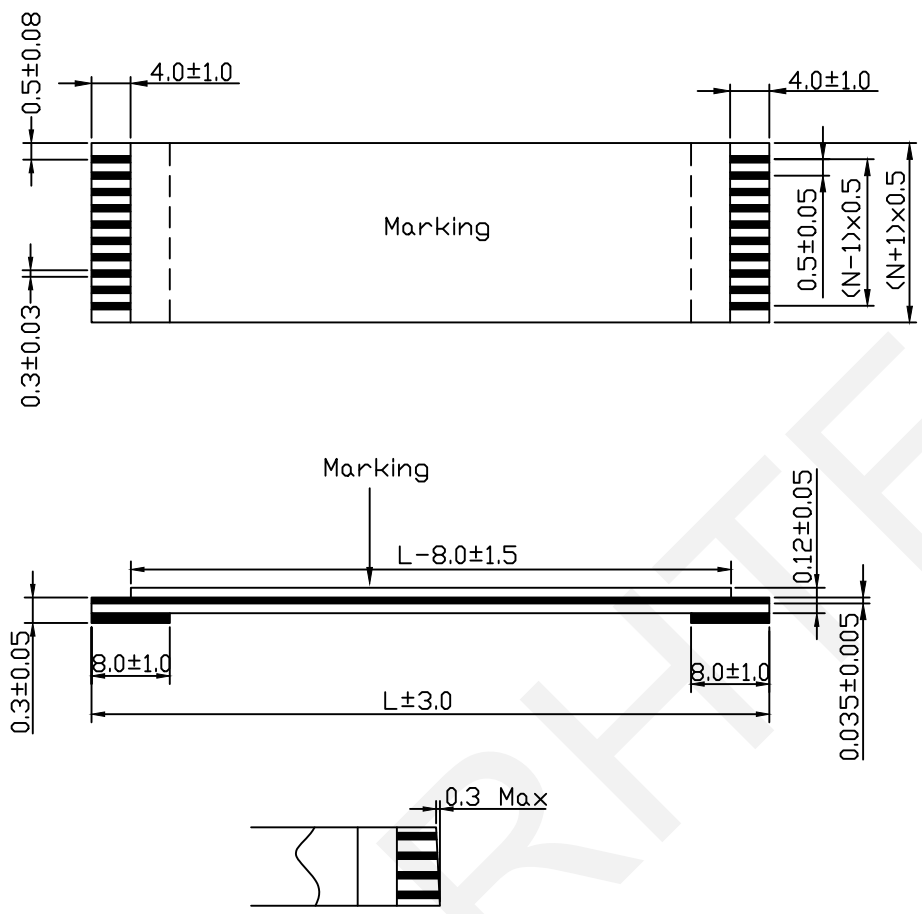

Note

- 1-100%Testes No Short or Break Circuit
- 2-Storage condition:
Temp:15°C~25°C
Humidity:30~60RH%
- 3-Conductor:0.035x0.3mm
- 4-Supporting Tape:0.225mm PET,BLUE
- 5-Insulation:0.043mm PET,White

Order Information

RHTQYAB-FFC-0.5-XXP-LXXX A 4/8

0.5: Pitch 0.5mm

XXP: Number of Conductor

XXX: Length 050=50mm 150=150mm

A: Type

4/8: Strip Length/Supporting Tape Length



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 0.5mm FFC Cable A Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTQYAB-FFC-0.5-XXP-LXXXA4/8


± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN



G

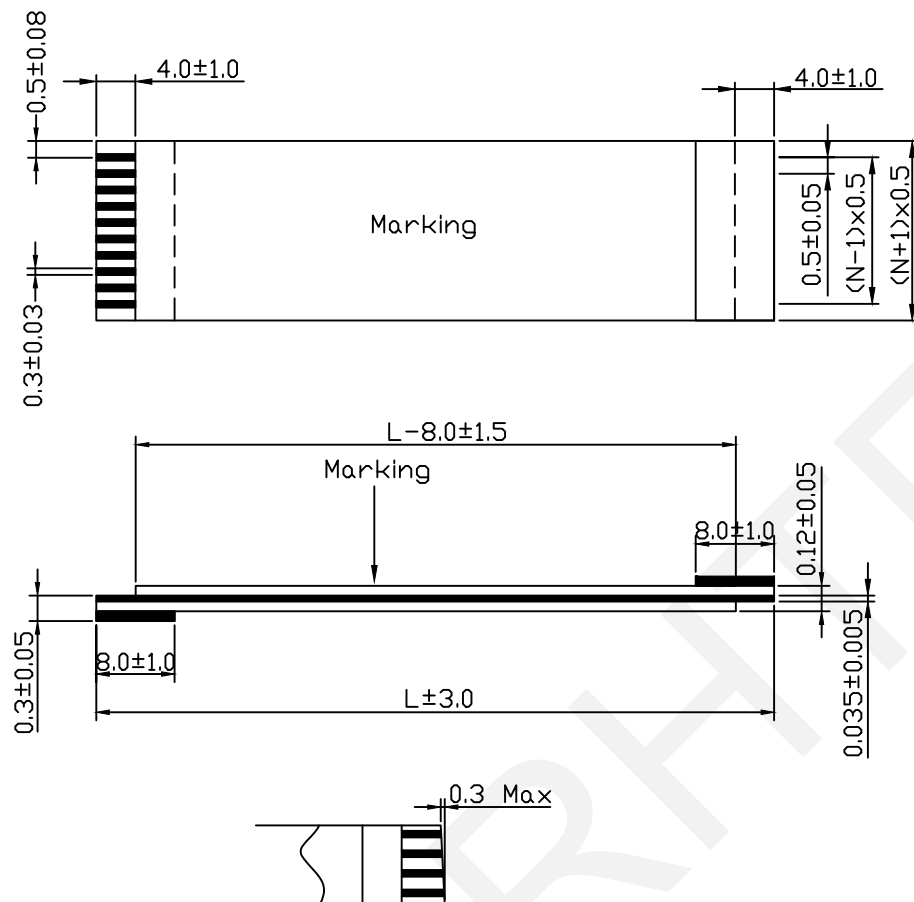

Note

- 1-100% Testes No Short Or Break Circuit
- 2-Storage condition:
Temp: $15^{\circ}\text{C} \sim 25^{\circ}\text{C}$
Humidity: $30 \sim 60\text{RH}\%$
- 3-Conductor: $0.035 \times 0.3\text{mm}$
- 4-Supporting Tape: 0.225mm PET, BLUE
- 5-Insulation: 0.043mm PET, White

Order Information

RHTQYAB-FFC-0.5-XXP-LXXX B 4/8

0.5: Pitch 0.5mm

XXP: Number Of Conductor

XXX: Length 050=50mm 150=150mm

B: Type

4/8: Strip Length/Supporting Tape Length



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 0.5mm FFC Cable B Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTQYAB-FFC-0.5-XXP-LXXXB4/8

± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN



G

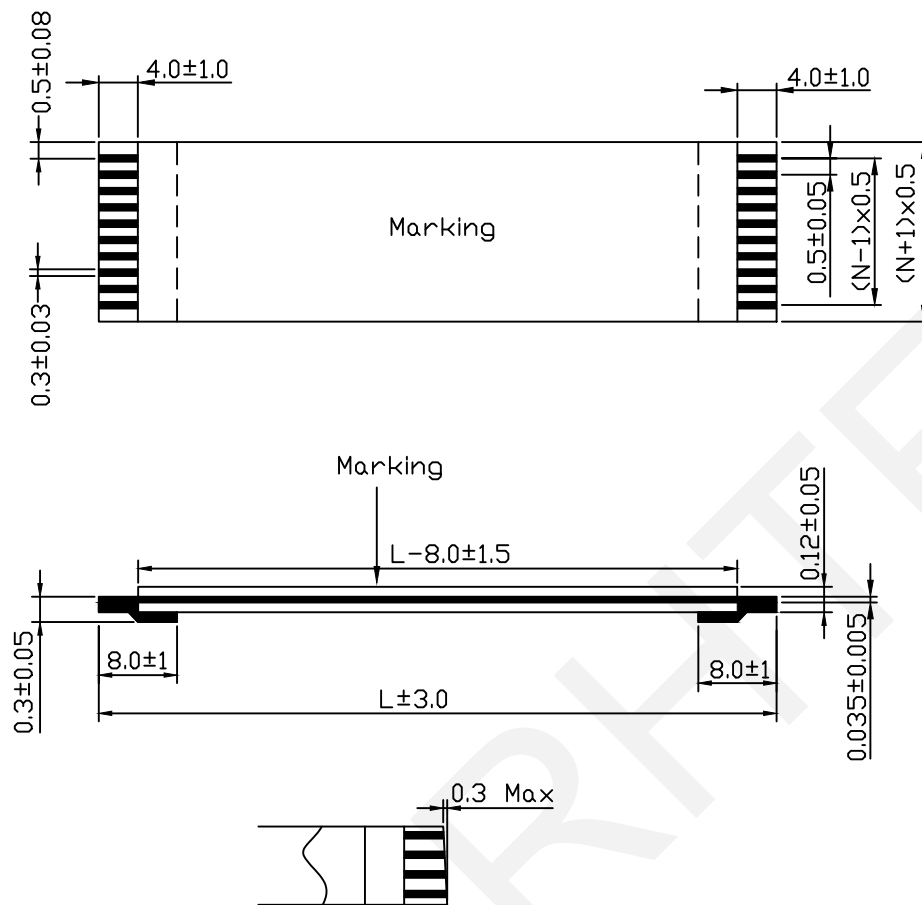

Note

- 1-100%Testes No Short or Break Circuit
- 2-Storage condition:
Temp:15°C~25°C
Humidity:30~60RH%
- 3-Conductor:0.035x0.3mm
- 4-Supporting Tapc:0.225mm PET,BLUE
- 5-Insulation:0.043mm PET,White

Order Information

RHTQYAB-FFC-0.5-XXP-LXXX C 4/8

- 0.5: Pitch 0.5mm
- XXP: Number of Conductor
- XXX: Length 050=50mm 150=150mm
- C: Type
- 4/8: Strip Length/Supporting Tape Length




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

Pitch 0.5mm FFC Cable C Type
THIRD ANGLE PROJECTION
RHTQYAB-FFC-0.5-XXP-LXXXC4/8

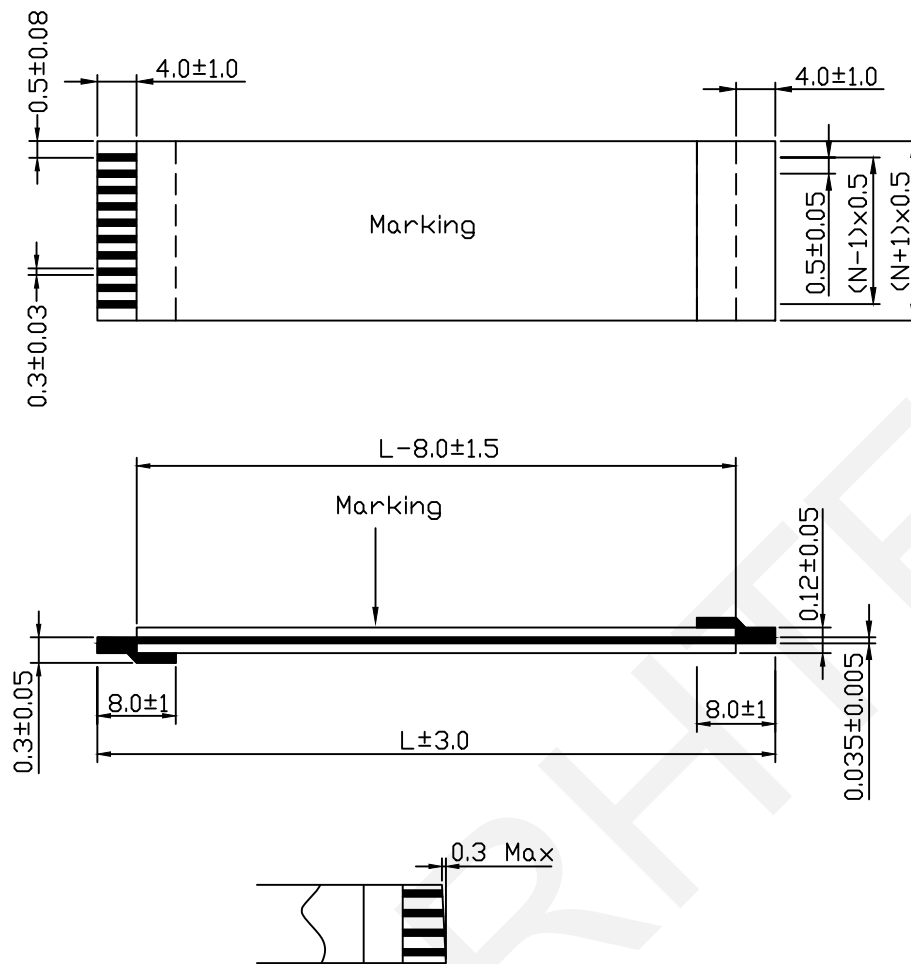

Note

1-100%Testes No Short Or Break Circult

2-Storage condition:

Temp:15°C~25°C

Humidity:30~60RH%

3-Conductor:0.035x0.3mm

4-Supporting Tapc:0.225mm PET,BLUE

5-Insulation:0.043mm PET,White

Order Information

RHTQYAB-FFC-0.5-XXP-LXXX D 4/8

0.5: Pitch 0.5mm

XXP: Number Of Conductor

XXX: Length 050=50mm 150=150mm

D: Type

4/8: Strip Length/Supporting Tape Length



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 0.5mm FFC Cable D Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTQYAB-FFC-0.5-XXP-LXXXD4/8

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN