


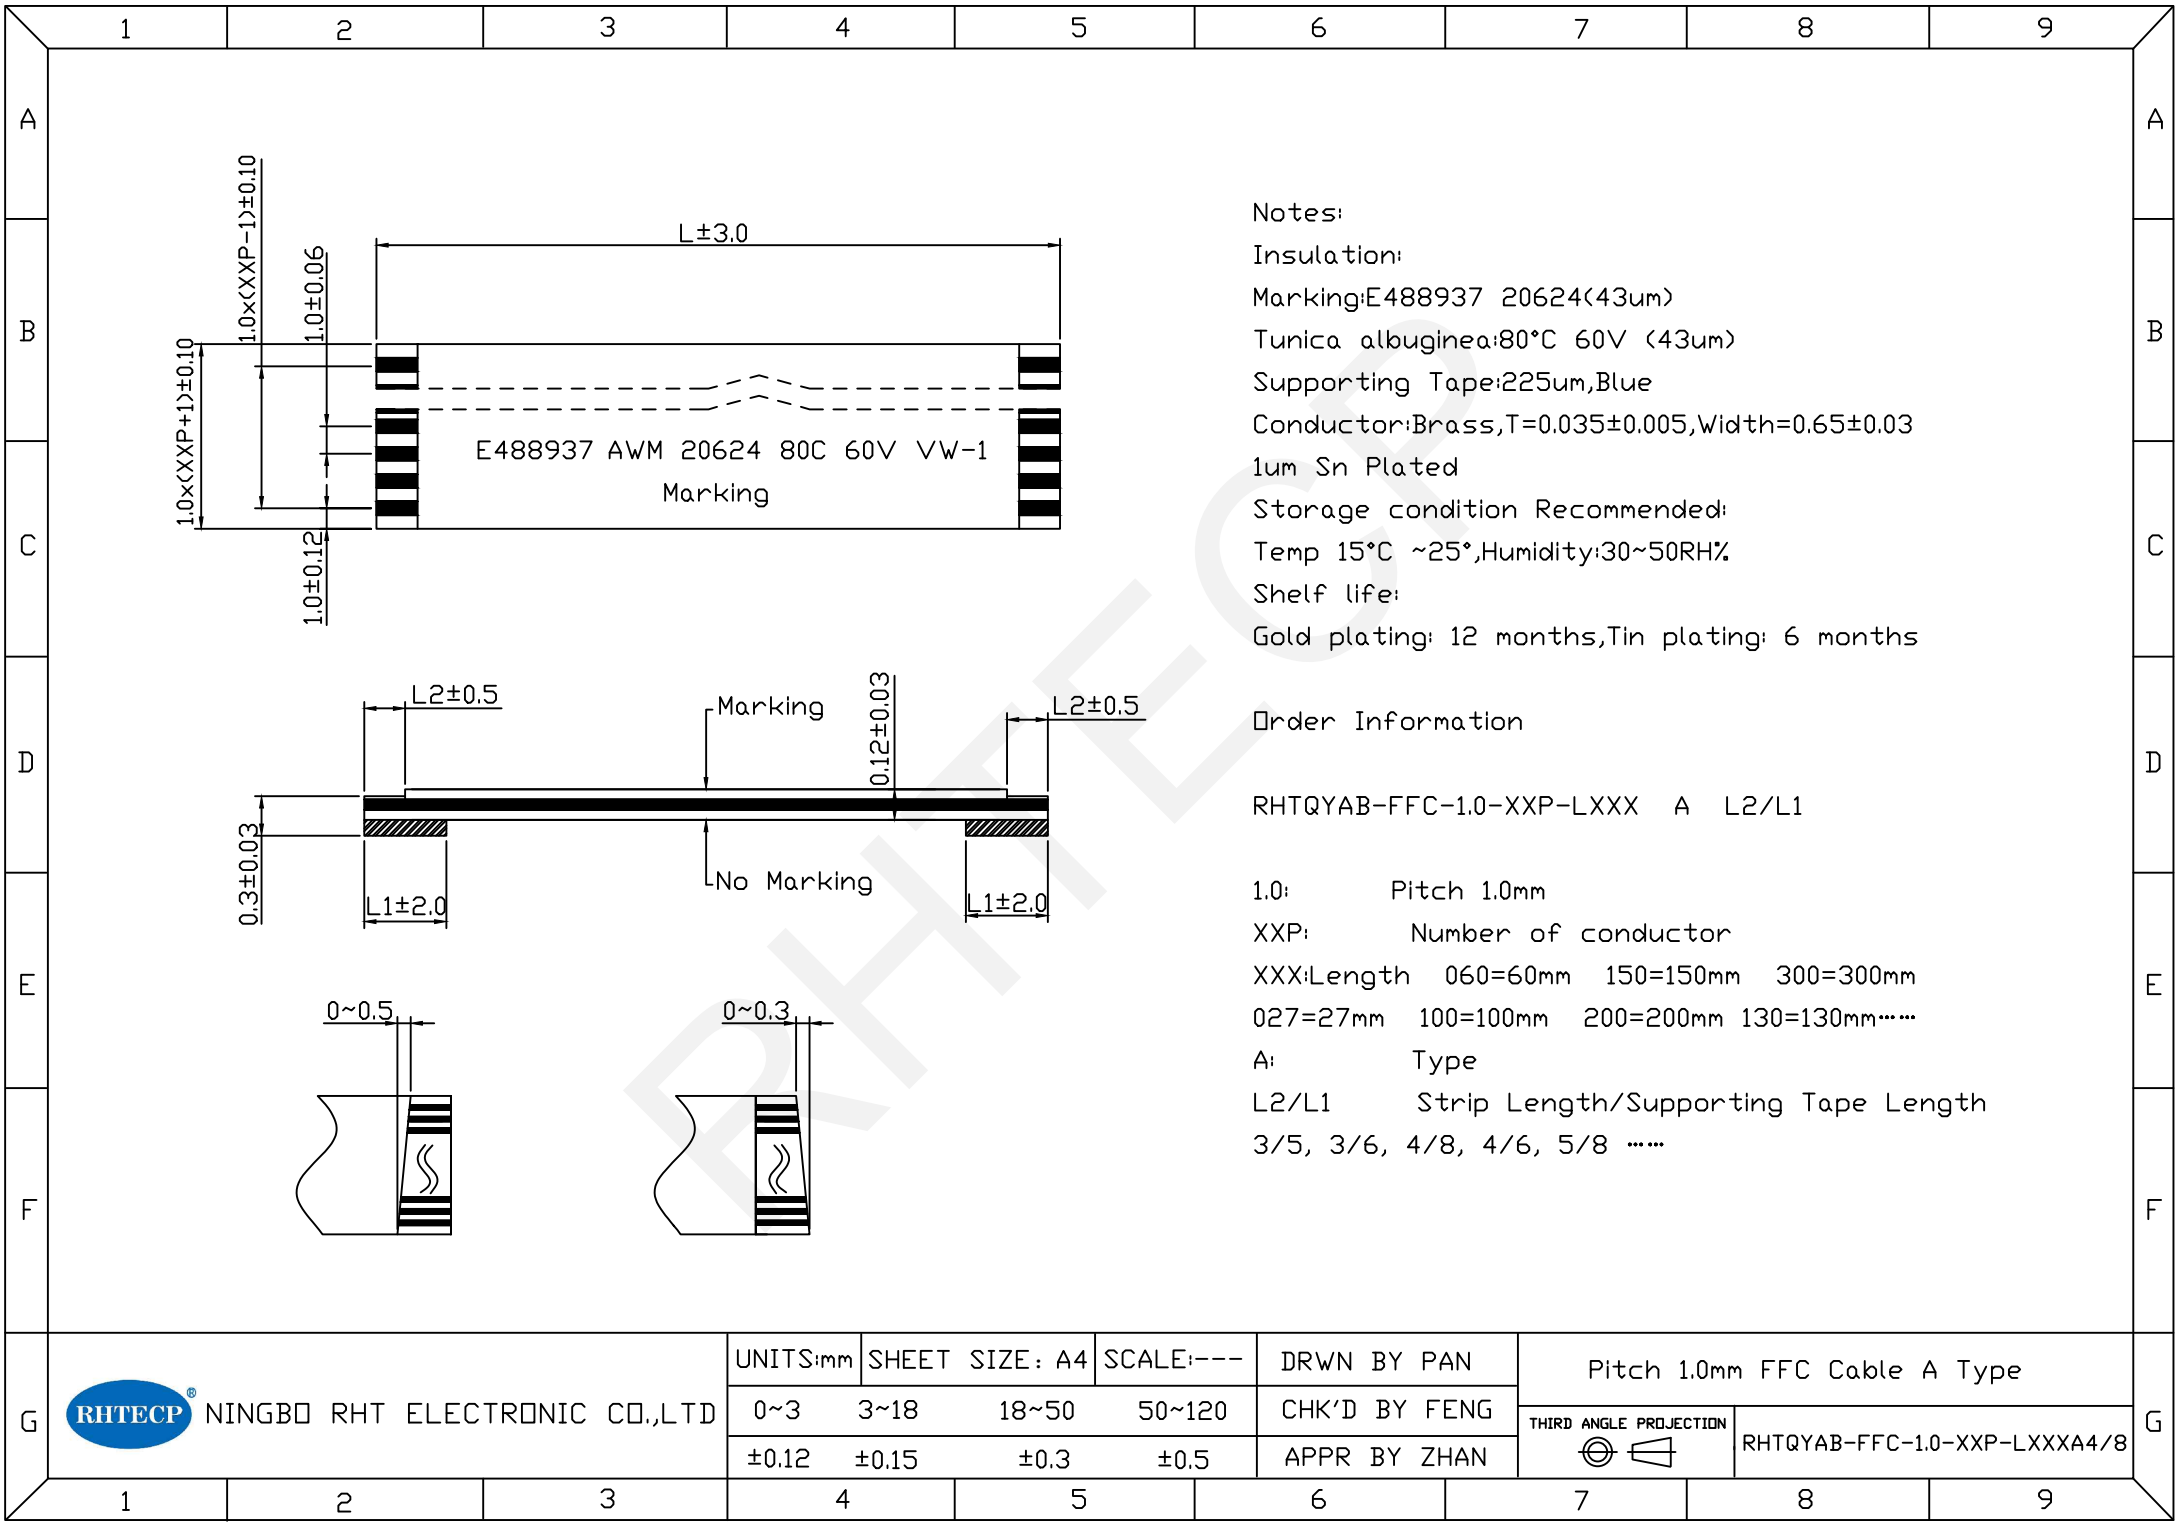


Notes:
Insulation:
Marking:E488937 20624(43um)
Tunica albuginea:80°C 60V (43um)
Supporting Tape:225um,Blue
Conductor:Brass,T=0.035±0.005,Width=0.65±0.03
1um Sn Plated
Storage condition Recommended:
Temp 15°C ~25°,Humidity:30~50RH%
Shelf life:
Gold plating: 12 months,Tin plating: 6 months

Order Information

RHTQYAB-FFC-1.0-XXP-LXXX A L2/L1

1.0: Pitch 1.0mm
XXP: Number of conductor
XXX:Length 060=60mm 150=150mm 300=300mm
027=27mm 100=100mm 200=200mm 130=130mm.....
A: Type
L2/L1 Strip Length/Supporting Tape Length
3/5, 3/6, 4/8, 4/6, 5/8

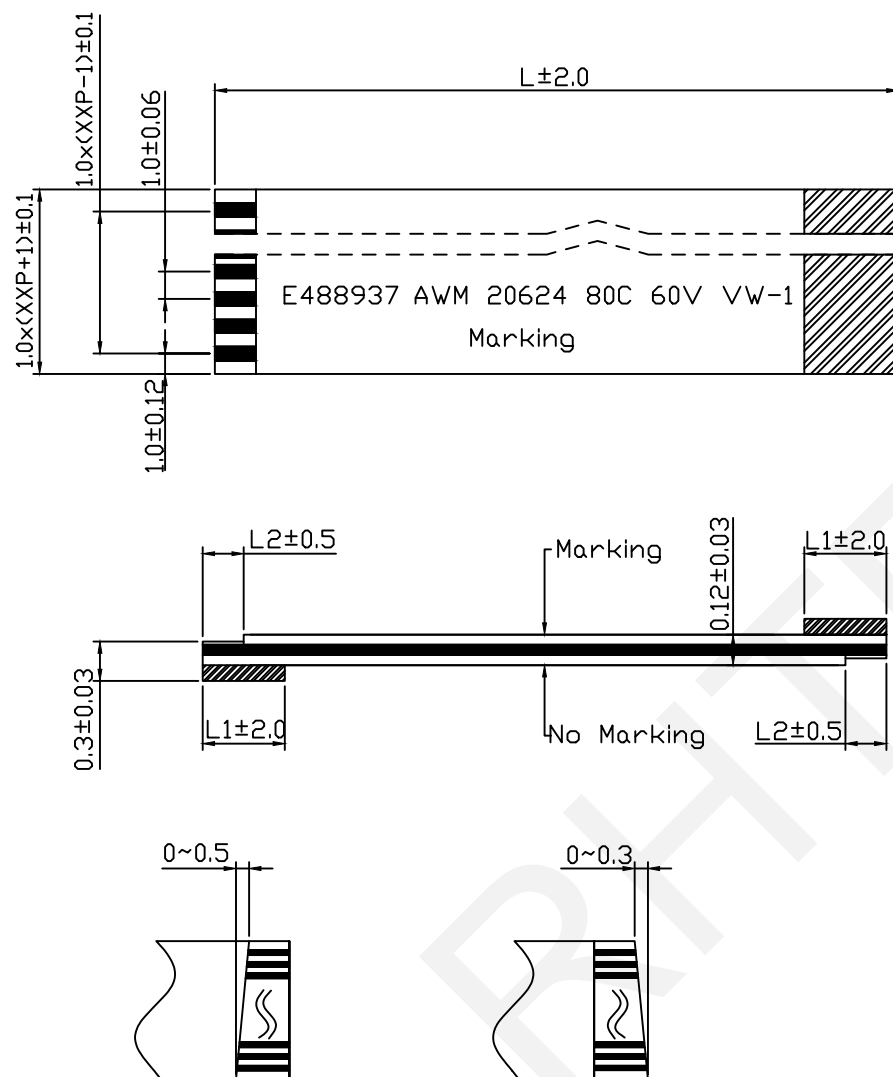

Notes:

Insulation:

Marking: E488937 20624 (43um)

Tunica albuginea: 80°C 60V (43um)

Supporting Tape: 225um, Blue

Conductor: Brass, $T = 0.035 \pm 0.005$, Width = 0.65 ± 0.03

1um Sn Plated

Storage condition Recommended:

Temp 15°C ~ 25°C, Humidity: 30~50RH%

Shelf life:

Gold plating: 12 months, Tin plating: 6 months

Order Information

RHTQYAB-FFC-1.0-XXP-LXXX B L2/L1

1.0: Pitch 1.0mm

XXP: Number of conductor

XXX: Length 055=55mm 150=150mm 300=300mm

027=27mm 100=100mm 200=200mm 076=76mm.....

B: Type

L2/L1 Strip Length/Supporting Tape Length

3/5, 3/6, 4/8, 4/6, 5/8

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 1.0mm FFC Cable B Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTQYAB-FFC-1.0-XXP-LXXXB4/8

± 0.12

± 0.15



± 0.3

± 0.5

APPR BY ZHAN



G

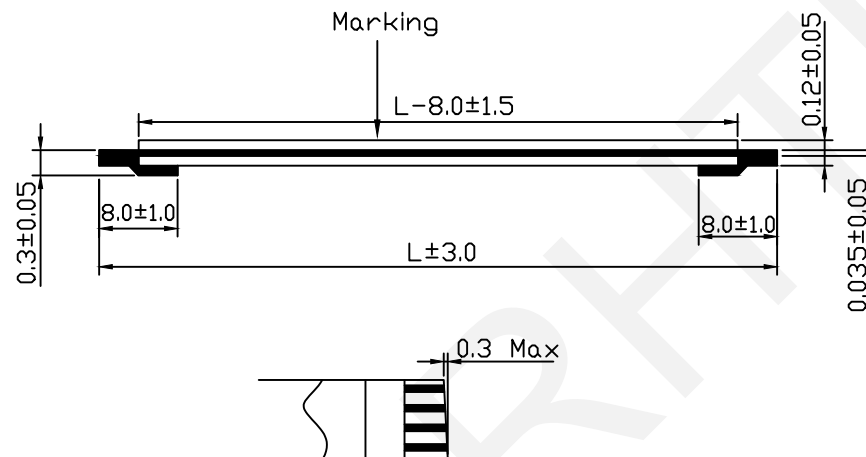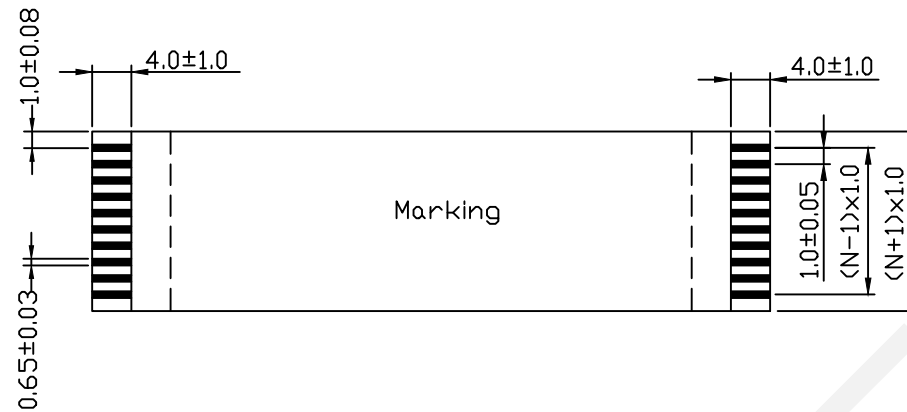

Note

1-100%Testes No Short Or Break Circuit

2-Storage condition:

Temp:15°C~25°C

Humidity:30~ 60RH%

3-Conductor:0.035x0.65mm

4-Supporting Tap:0.225mm PET,BLUE

5-Insulation:0.043mm PET,White

Order Information

RHTQYAB-FFC-1.0-XXP-LXXX C 4/8

1.0: Pitch 1.0mm

XXP: Number Of Conductor

XXX: Length 050=50mm 150=150mm

C: Type

4/8: Strip Length/Supporting Tape Length

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 1.0mm FFC Cable C Type

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTQYAB-FFC-1.0-XXP-LXXXC4/8


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN

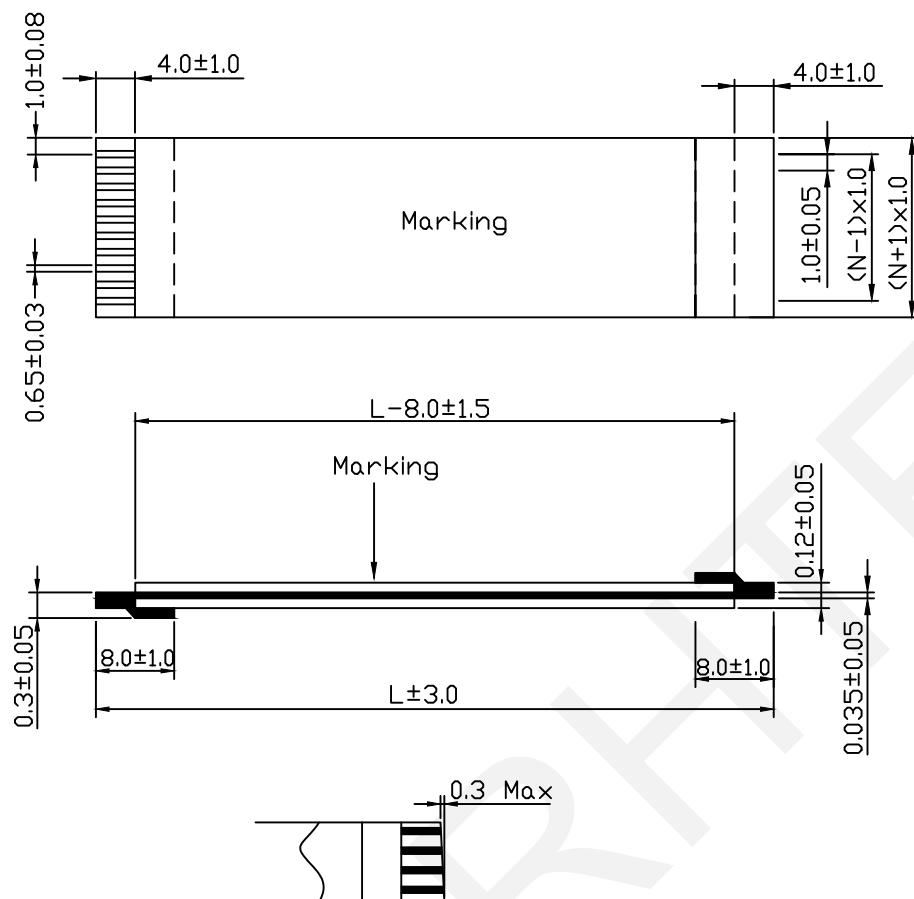

Note

1-100% Testes No Short Or Break Circult

2-Storage condition:

Temp:15°C~25°C

Humidity:30~ 60RH%

3-Conductor:0.035x0.65mm

4-Supporting Tapc:0.225mm PET,BLUE

5-Insulation:0.043mm PET,White

Order Information

RHTQYAB-FFC-1.0-XXP-LXXX D 4/8

1.0: Pitch 1.0mm

XXP: Number Of Conductor

XXX: Length 050=50mm 150=150mm

D: Type

4/8: Strip Length/Supporting Tape Length

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 1.0mm FFC Cable D Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTQYAB-FFC-1.0-XXP-LXXXD4/8


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



G