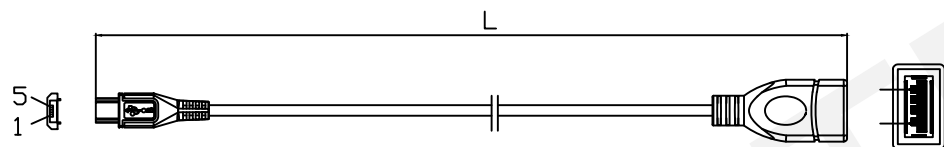
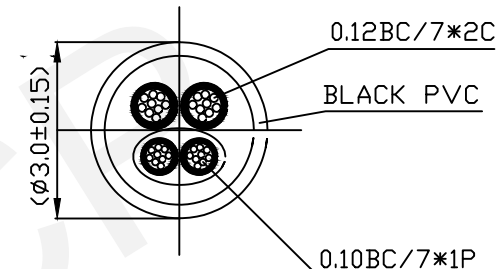
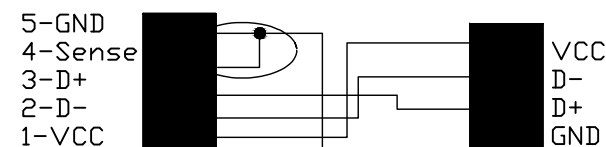




	1	2	3	4	5	6	7	8	9										
A	Dimensions: [mm]  CONTACT:GOLD PLATED 1u" P2:USB2.0 MICRO plug P0:USB2.0 A Jack CONTACT:GOLD PLATED 1u" L(m)=0.15±0.02 0.12BC/7*2C BLACK PVC 0.10BC/7*1P  WIRING DIAGRAM P2 MICRO 5P P1 USB A TYPE F 																		
B																			
C																			
D																			
E																			
F																			
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm <table><tr><td>0~3</td><td>3~18</td><td>18~50</td><td>50~120</td></tr><tr><td>±0.12</td><td>±0.15</td><td>±0.3</td><td>±0.5</td></tr></table>		0~3	3~18	18~50	50~120	±0.12	±0.15	±0.3	±0.5	SHEET SIZE: A4		SCALE:---		DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	DTG,USB 2.0 CABLE AK-AD-09 THIRD ANGLE PROJECTION  RHTQYAB-R13-USBAB-L015
0~3	3~18	18~50	50~120																
±0.12	±0.15	±0.3	±0.5																
	1	2	3	4	5	6	7	8	9										

	1	2	3	4	5	6	7	8	9																							
A	RoHS COMPLIANT REACH COMPLIANT									A																						
B	Technical Characteristics <table><tr><th>Parameter</th><th>Value</th></tr><tr><td>Cable Spec</td><td>0.12BC 72C+0.10BC 71P,ØD3.0mm</td></tr><tr><td>Jacket</td><td>Black PVC</td></tr><tr><td>Connector A</td><td>USB2.0 A Jack</td></tr><tr><td>Connector B</td><td>USB2.0 Micro B Plug</td></tr><tr><td>Contact Plating</td><td>Gold Plated 1u''</td></tr><tr><td>Shell Plating</td><td>Nickel Plated</td></tr><tr><td>Mold Assembly</td><td>Black Color</td></tr><tr><td>Open/Short Test</td><td>100% Test</td></tr><tr><td>Insulation Resistance</td><td>5M</td></tr><tr><td>Compliance</td><td>RoHS Compliant</td></tr></table>									Parameter	Value	Cable Spec	0.12BC 72C+0.10BC 71P,ØD3.0mm	Jacket	Black PVC	Connector A	USB2.0 A Jack	Connector B	USB2.0 Micro B Plug	Contact Plating	Gold Plated 1u''	Shell Plating	Nickel Plated	Mold Assembly	Black Color	Open/Short Test	100% Test	Insulation Resistance	5M	Compliance	RoHS Compliant	B
Parameter	Value																															
Cable Spec	0.12BC 72C+0.10BC 71P,ØD3.0mm																															
Jacket	Black PVC																															
Connector A	USB2.0 A Jack																															
Connector B	USB2.0 Micro B Plug																															
Contact Plating	Gold Plated 1u''																															
Shell Plating	Nickel Plated																															
Mold Assembly	Black Color																															
Open/Short Test	100% Test																															
Insulation Resistance	5M																															
Compliance	RoHS Compliant																															
C										C																						
D										D																						
E										E																						
F										F																						
G	RHTECP® NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	DTG,USB 2.0 CABLE AK-AD-09				G																				
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	RHTQYAB-R13-USBAB-L015																						
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN																								
	1	2	3	4	5	6	7	8	9																							

	1	2	3	4	5	6	7	8	9		
A	 Important Notice The following terms and conditions apply to all products supplied and marketed by NINGBO RHT ELECTRONIC CO., LTD.									A	
B	1. General Statement RHT connectors are designed and manufactured in accordance with international quality management standards and internal control procedures to ensure stable electrical and mechanical performance under specified operating conditions.				4. Compliance and Quality Assurance All products comply with applicable RoHS environmental directives. Quality inspections are performed according to RHT internal standards. Upon request, relevant inspection reports may be provided.					B	
C	2. Scope of Application Products are intended for general electronic and industrial applications. For safety-critical systems including but not limited to medical devices, automotive safety systems, aerospace, railway control, nuclear facilities, or other life-support systems, prior written approval from RHT is required.				5. Soldering and Assembly Soldering must comply with recommended RHT solder profiles. Use outside recommended processing conditions may affect product reliability and void warranty coverage.					C	
D	3. Customer Design Responsibility The responsibility for product selection, validation, and suitability in a specific customer application remains solely with the customer. Customers must perform adequate verification testing, reliability evaluation, and risk assessment before mass production release.				6. Storage and Handling Products should be stored in original sealed packaging under dry conditions. Recommended shelf life is 12 months from production date. Mechanical stress, improper handling, or contamination may affect performance.					D	
E					7. Cleaning and Chemical Exposure Cleaning agents must be compatible with connector housing and plating materials. Immersion cleaning is not recommended unless specifically validated by the customer.					E	
F										F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	DTG,USB 2.0 CABLE AK-AD-09			
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RHTQYAB-R13-USBAB-L015		
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			
	1	2	3	4	5	6	7	8	9		