




NOTE:
1.MATERIAL:
a.HOUSING:PBT
b.CONTACT:Mn Steel
(SURFACE PLATING:NI100u"-120u")
2.ELECTRIC:
a.CONTACT RESISTANCE:30 MILLIOHMS MAX
b.INSULATION RESISTANCE:1000 MEA OHMS MIN
C.DIELECTNIC VOLTAGE:500V AC ONE SEC LEVEL
d.OPERATING TEMPERATURE:-25°C~+85°C

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	Mn Steel,T=0.50mm	Ni Plating
2	TERMINAL(+)	1	Mn Steel,T=0.50mm	Ni Plating
1	HOUSING	1	PBT	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING &COLOR

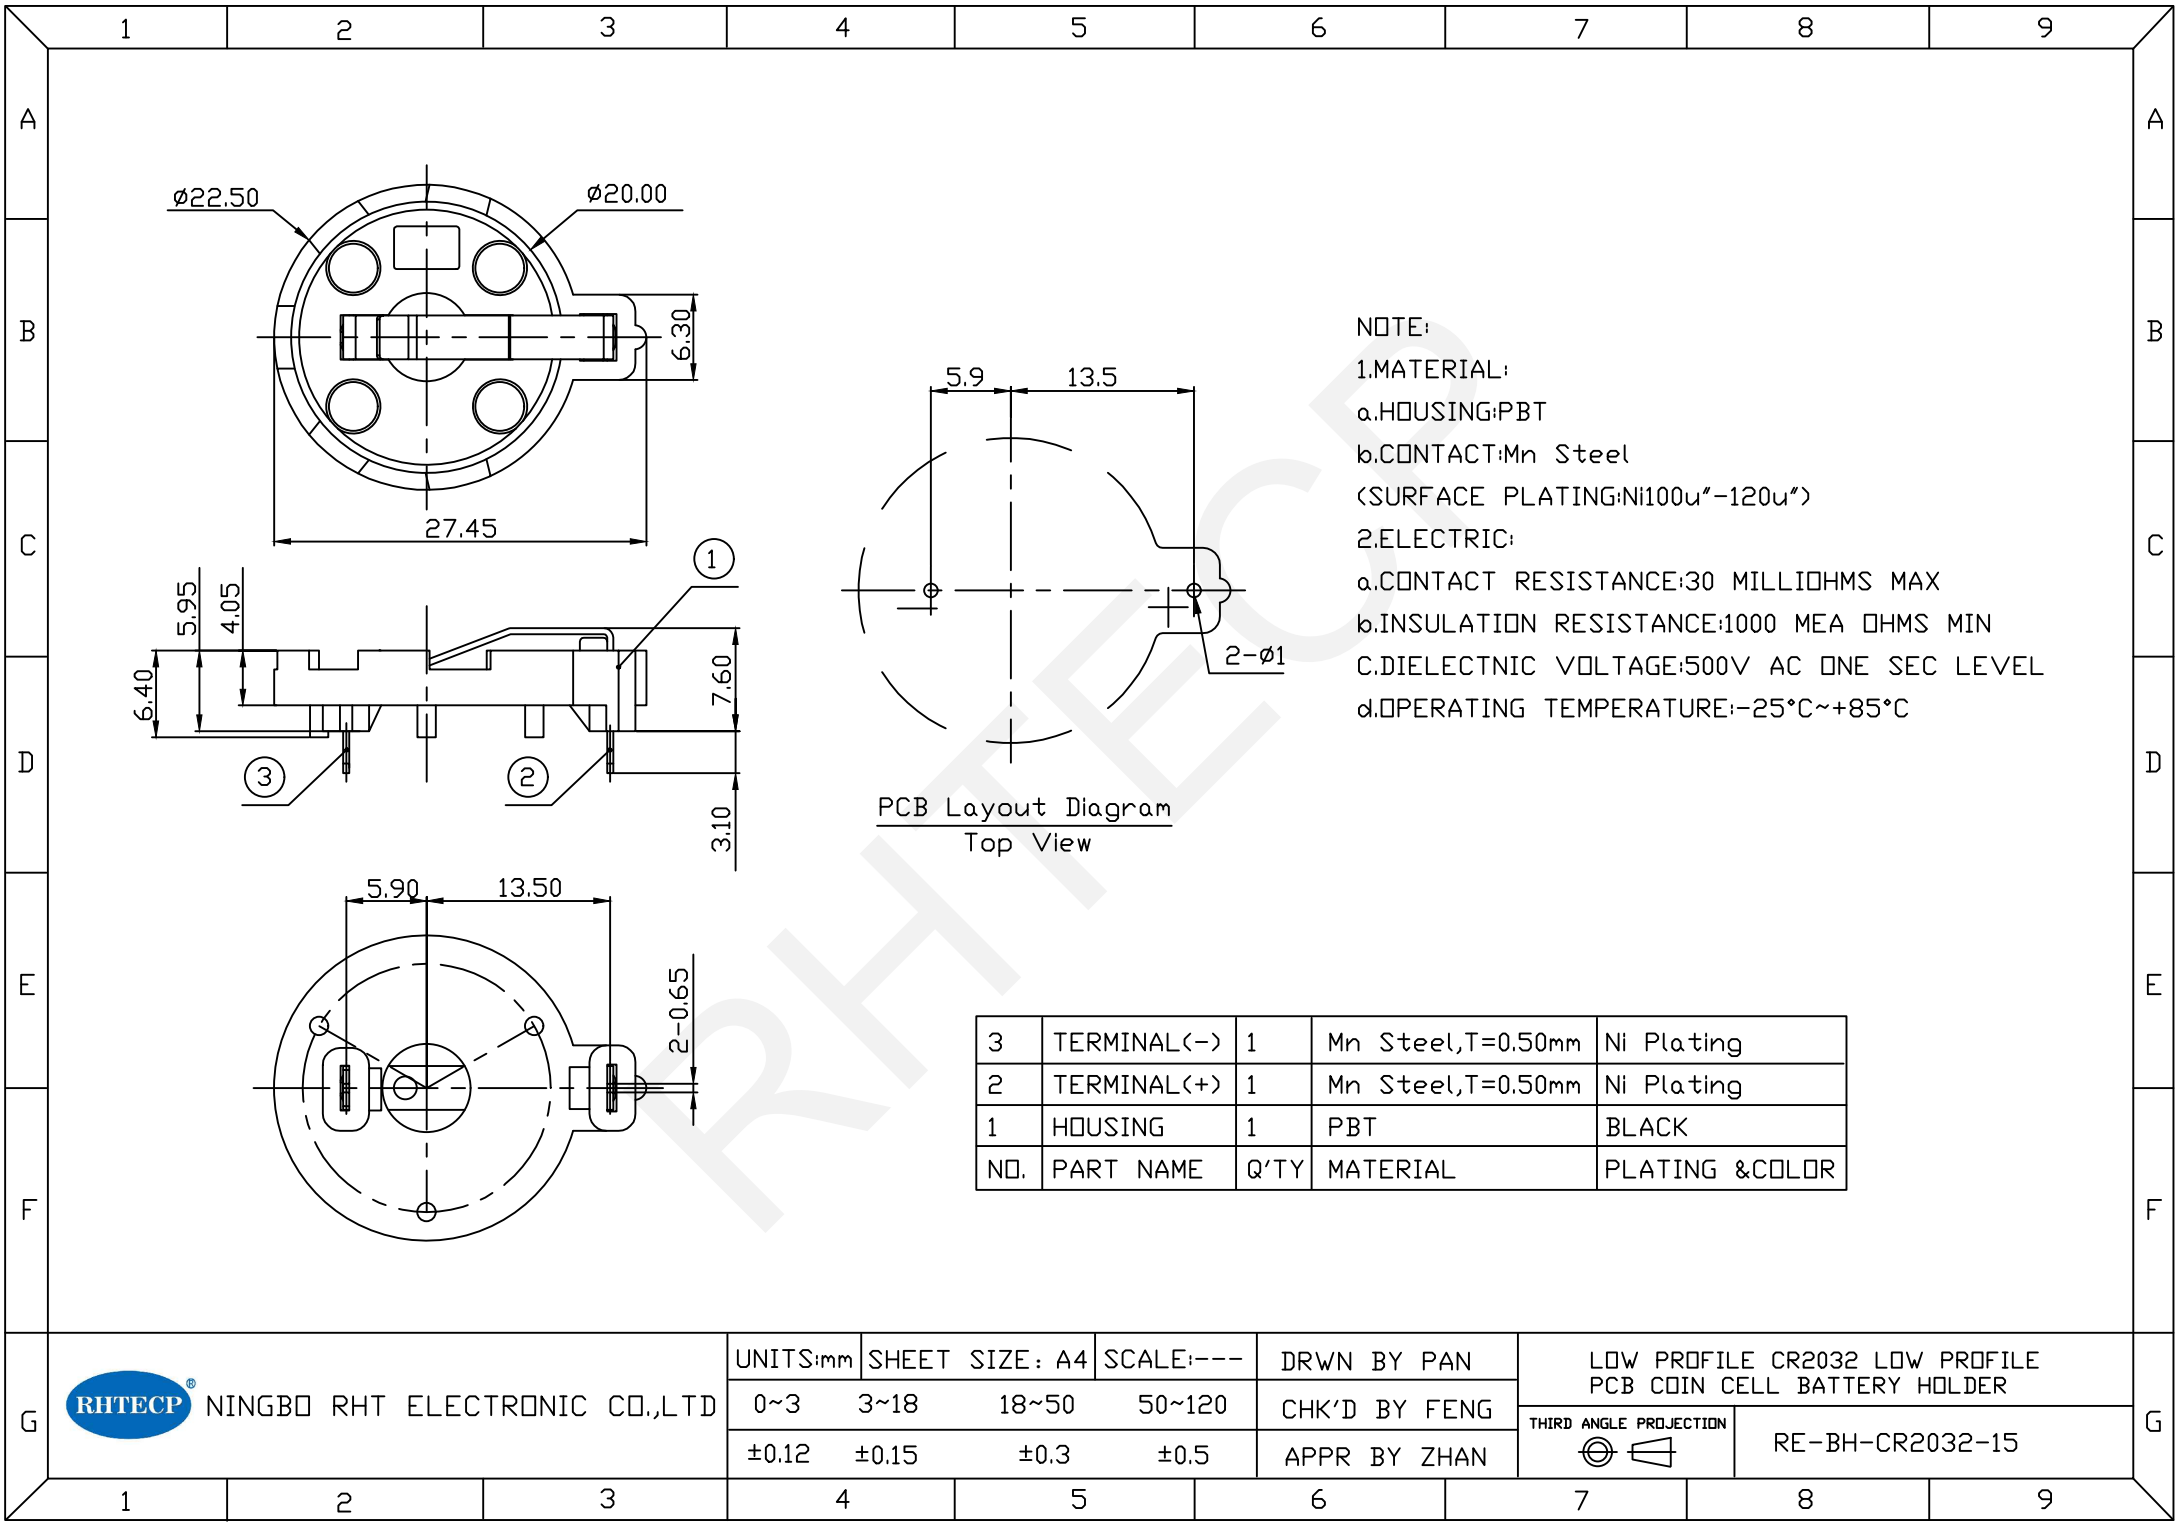

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

LOW PROFILE CR2032 LOW PROFILE PCB COIN CELL BATTERY HOLDER	
THIRD ANGLE PROJECTION 	RE-BH-CR2032-15