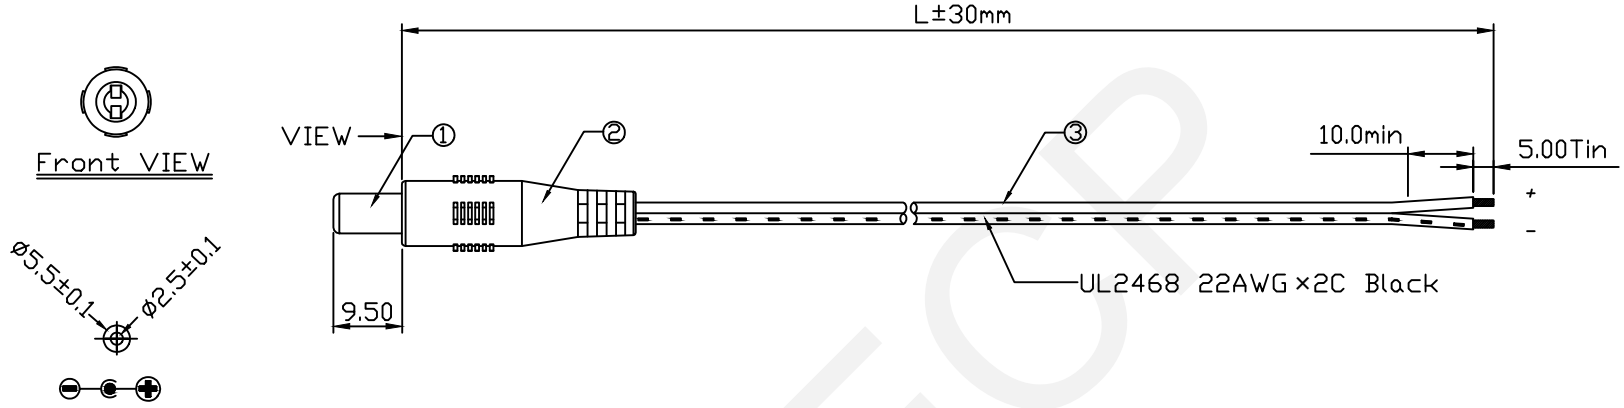


Note

1:Open/Short Test 100% Test.

2:Test Volts/insulation: DC 5V/500KΩ

3:All must be meet on RoHS Compliant

ITEM	PART NAME	Description	UNIT	Q'TY
1	Connector	5.5×2.5×9.5 DC Male PLUG	PCS	1
2	PVC molding	PVC,BLACK	g	xx
3	Cable	UL2468-22AWG×2C,Black	mm	L

Order Information

RHTQYAB-ACY002- 22 B 1000

ACY002: 5.5×2.5×9.5 DC Male-Tin

22: UL2468 22AWG×2C

B: Color: B- Black W-White

1000:Length 1000=1000mm,1500=1500mm

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	5.5×2.5×9.5mm To Tin, DC Male Cable
	0~3	3~18	18~50	50~120	CHK'D BY FENG
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
					THIRD ANGLE PROJECTION
					RHTQYAB-ACY002-22BXXXX