


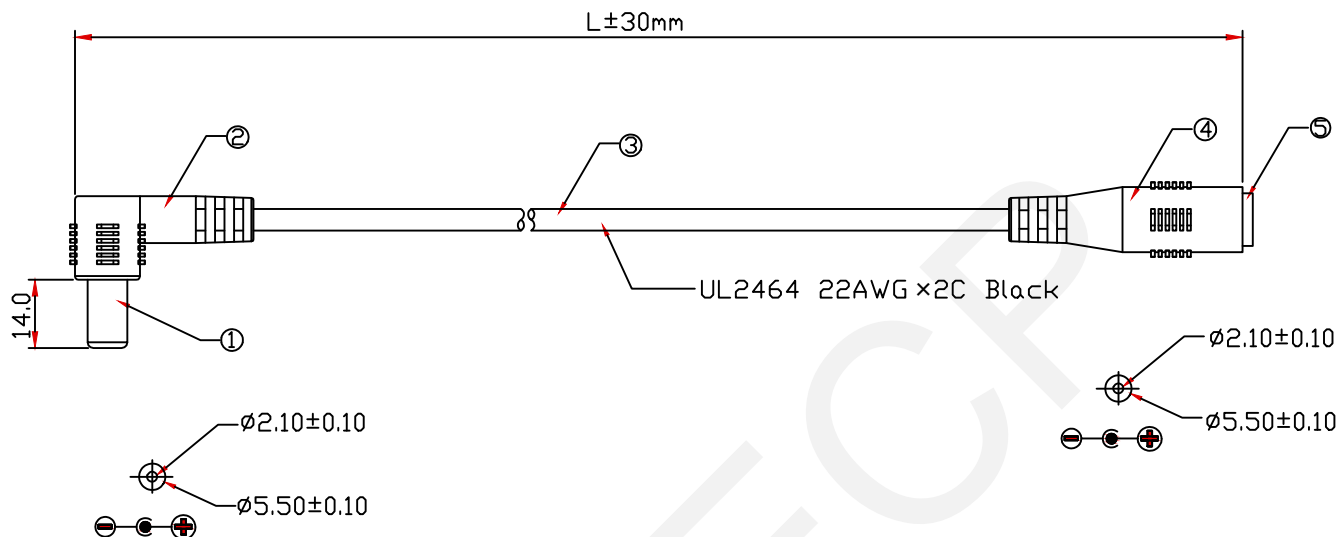

#### Note

- 1:Open/Short Test 100% Test.  
 2:Test Volts/Insulation: DC 5V/500KΩ  
 3:All must be meet on RoHS Compliant

#### Order Information

RHTQYAB-ARA002- 22 B 1000

| ITEM | PART NAME   | Description             | UNIT | Q'TY |
|------|-------------|-------------------------|------|------|
| 1    | Connector   | 5.5×2.1×14 DC Male PLUG | PCS  | 1    |
| 2    | PVC molding | PVC,BLACK,R/A Modul     | g    | xx   |
| 3    | Cable       | UL2464-22AWG×2C,Black   | mm   | L    |
| 4    | Connector   | 5.5×2.1 DC Female Jack  | pcs  | 1    |
| 5    | PVC molding | PVC,BLACK               | g    | xx   |

ARA002: 5.5×2.1 R/A Male to Female DC Cable

22: UL2464 22AWG×2C

B: Color: B- Black W-White

1000:Length 1000=1000mm,1500=1500mm