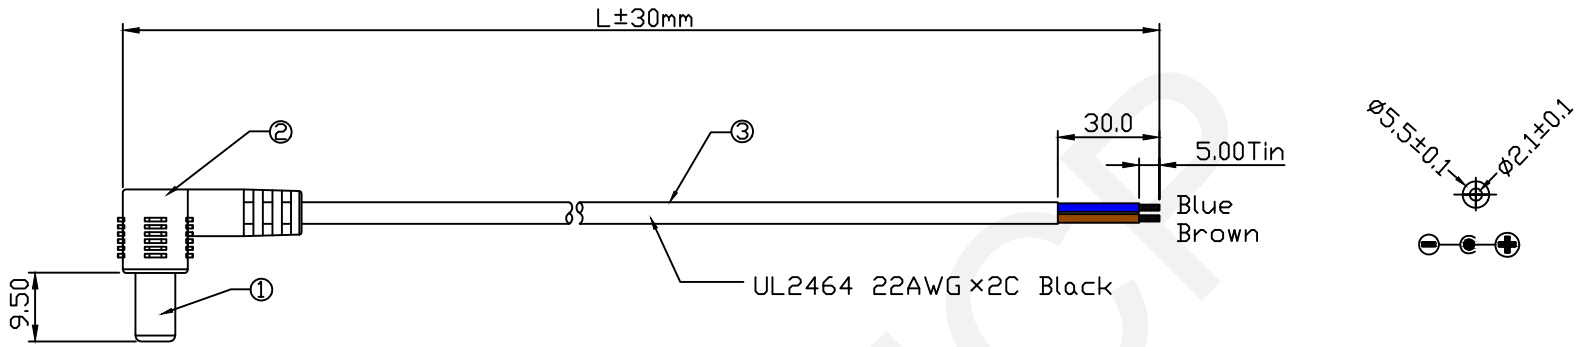



Note

1:Open/Short Test 100% Test.

2:Test Volts/insulation: DC 5V/500KΩ

3:All must be meet on RoHS Compliant

| ITEM | PART NAME | Description | UNIT | Q'TY |
|---|---|---|---|---|
| 1 | Connector | 5.5×2.1×9.5 DC Male PLUG | PCS | 1 |
| 2 | PVC molding | PVC,BLACK, R/A Modul | g | xx |
| 3 | Cable | UL2464-22AWG×2C,Black | mm | L |

Order Information

RHTQYAB-ARP003- 22 B 1000

ARP003: 5.5×2.1×9.5 R/A DC Male-Tin

22: UL2464 22AWG×2C

B: Color: B- Black W-White

1000:Length 1000=1000mm,1500=1500mm

| | | | | | |
|---|---|---|---|---|---|
| RHTECP NINGBO RHT ELECTRONIC CO.,LTD | UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN | 5.5×2.1×9.5mm R/A DC Cable |
| | 0~3 | 3~18 | 18~50 | 50~120 | CHK'D BY FENG |
| | ±0.12 | ±0.15 | ±0.3 | ±0.5 | APPR BY ZHAN |
| | | | | | THIRD ANGLE PROJECTION / RHTQYAB-ARP003-22BXXXX |