
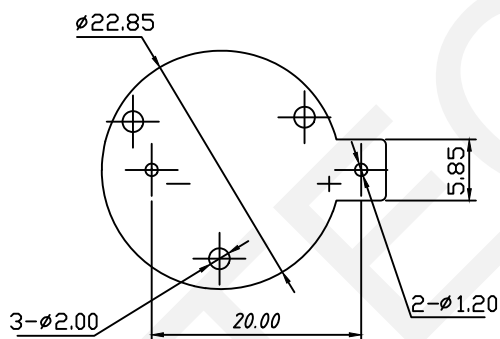
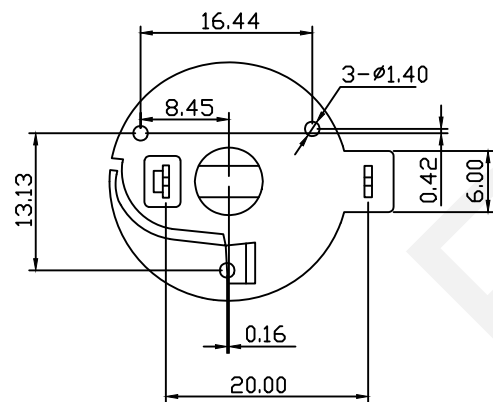
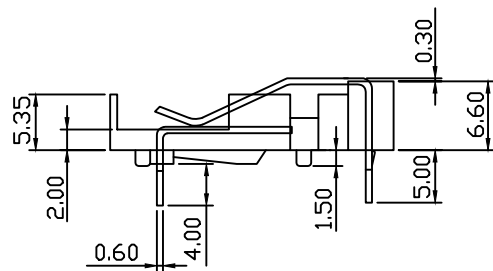


RoHS Compliance

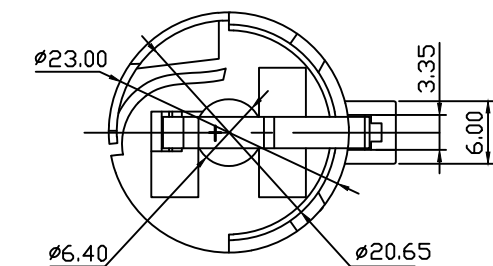

PCB Layout Diagram
Top View

Material:

Housing: PBT, UL94V-0, Black

Terminal(+): Mn Steel, T=0.60mm

Terminal(-): Mn Steel, T=0.60mm

Plating: Ni-Plating

Electrical Characteristics:

Contact Resistance: 30mΩ Max

Insulator Resistance: 1000MΩ Min

Dielectric Voltage: 500V AC One Sec Level

Operating Temperature: -25°C + 85°C

Order Information:

RE-BH-CR2032-03

CR2032 Coin

Battery Holder

Part Number



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CR2032 COIN BATTERY HOLDER ROHS

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RE-BH-CR2032-03

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN