
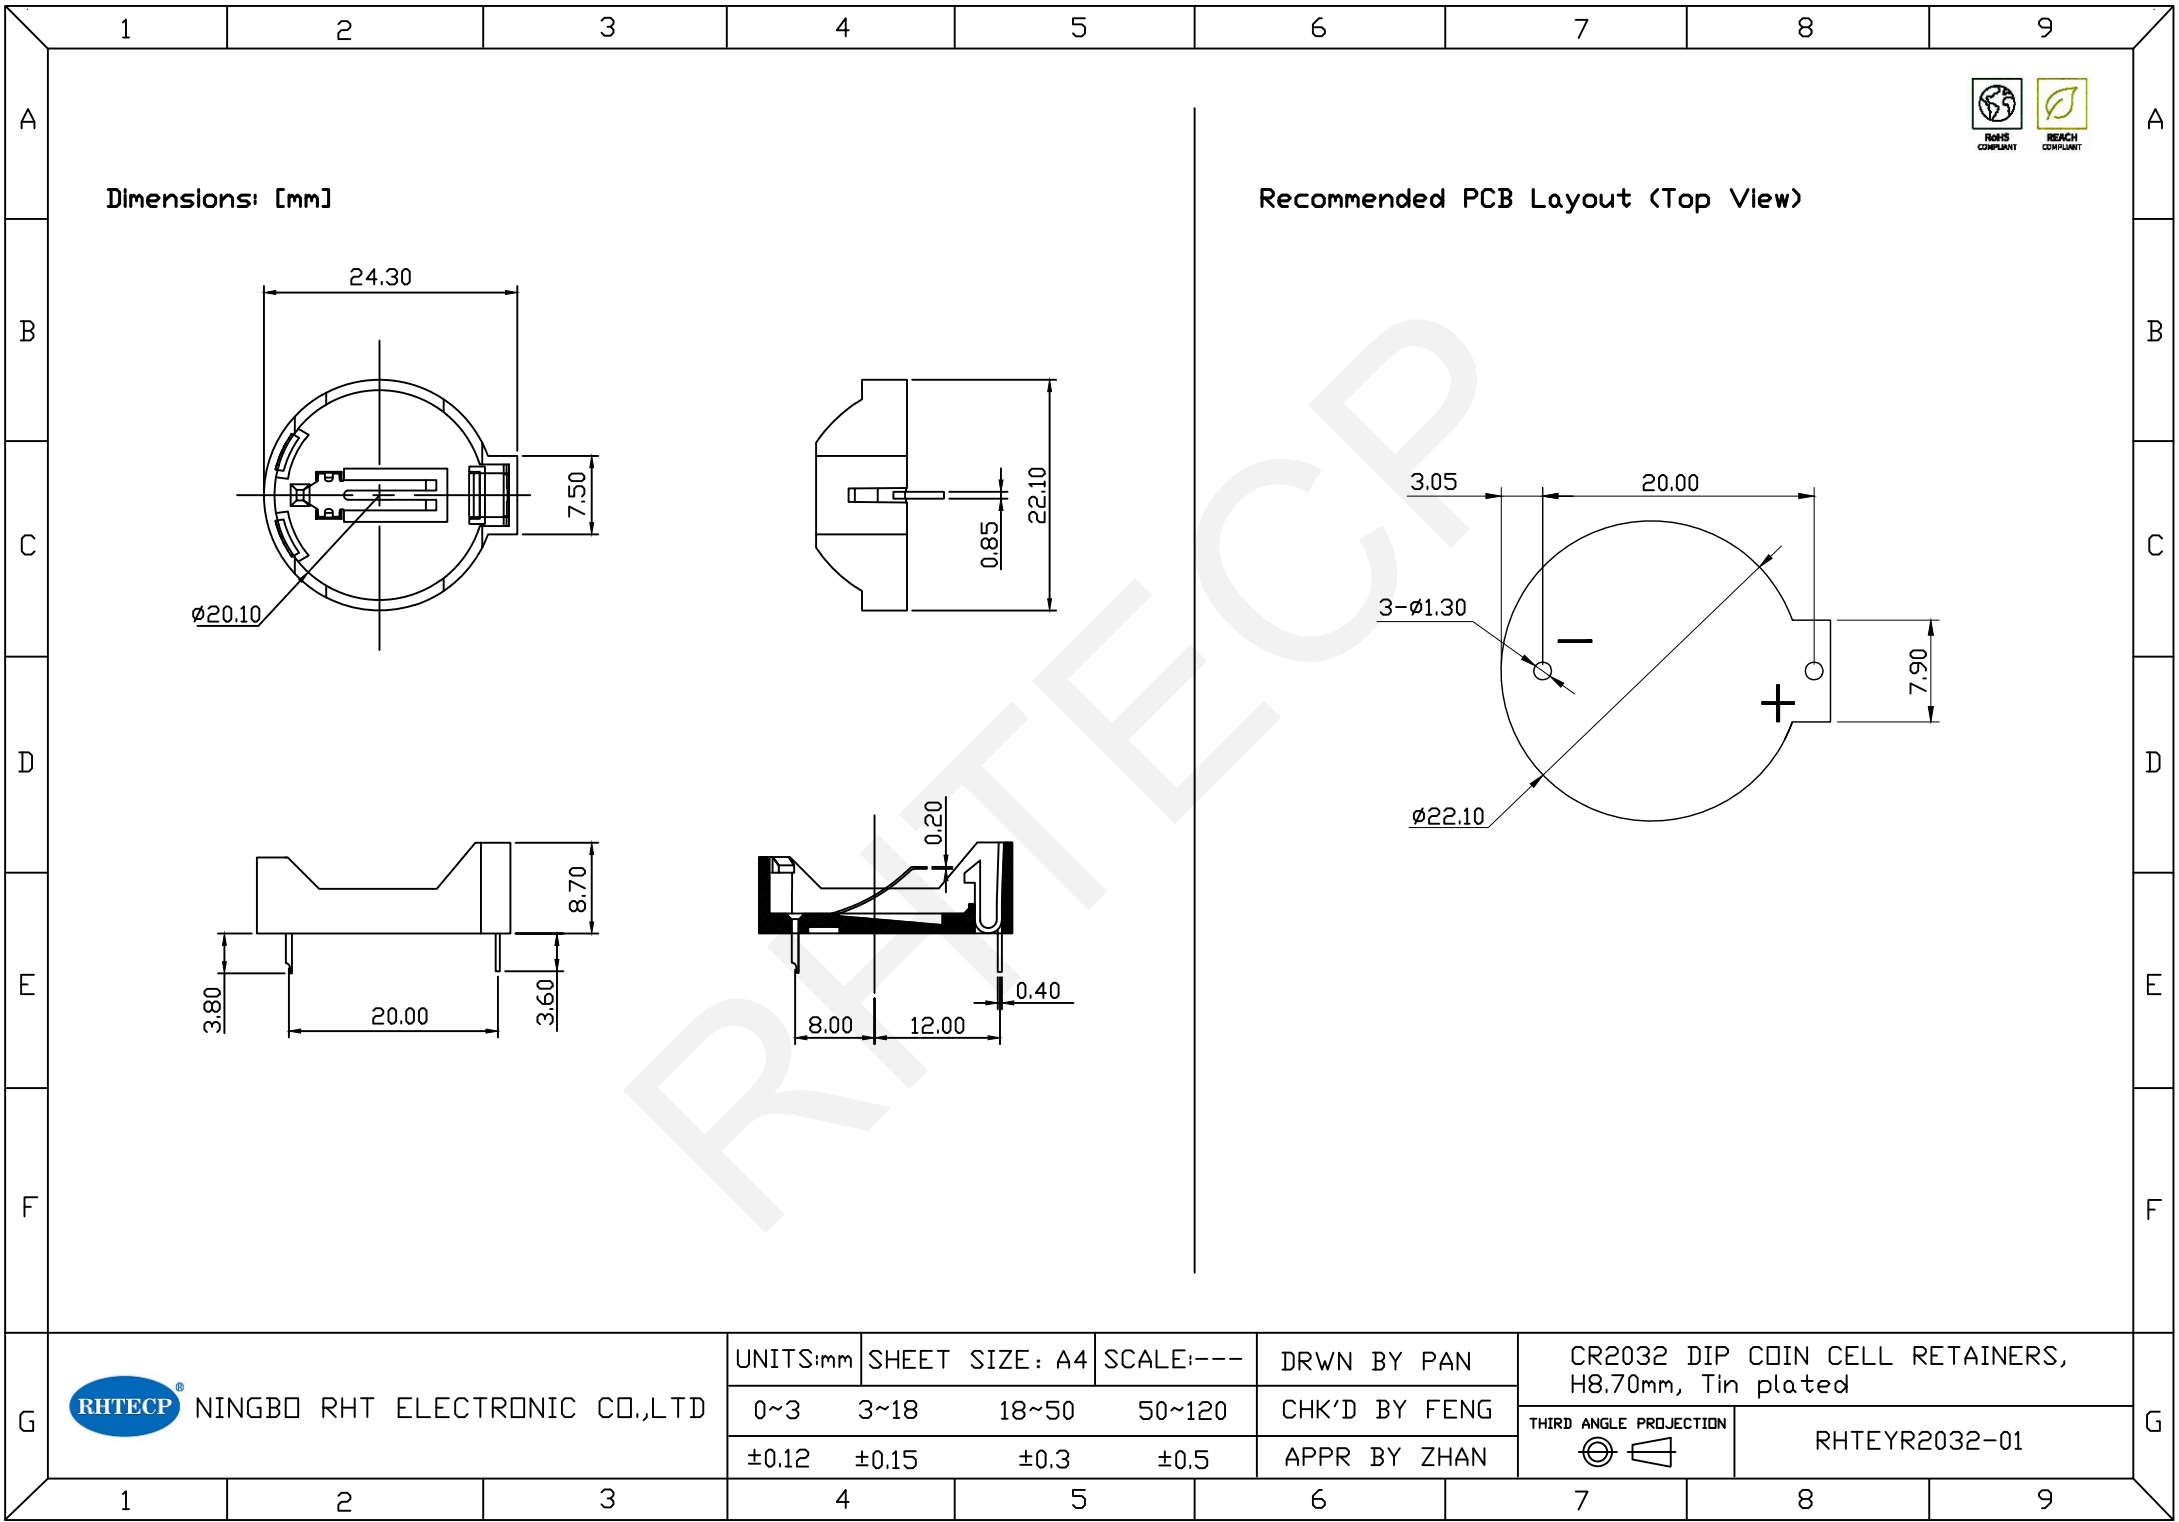





|                       | 1                                                                                                                                                                                                                                                                                                                          | 2 | 3     | 4        | 5              | 6         | 7             | 8                                                      | 9                                                                                                                                                                                                                                                      |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------|----------|----------------|-----------|---------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------|-----------------------|----------------|--------------------|-----------------------|-----------------------|-------------|---|
| A                     |                                                                                                                                                                                                                                                                                                                            |   |       |          |                |           |               |                                                        | <div><div><br/>RoHS<br/>COMPLIANT</div><div><br/>REACH<br/>COMPLIANT</div></div> | A                                                                                                                                                           |                    |                      |                       |                |                    |                       |                       |             |   |
| B                     | <div>Material</div> <table><tr><th>Item</th><th>Specification</th></tr><tr><td>Housing</td><td>Pa66, Ul94v-0, Black</td></tr><tr><td>Terminal(+)</td><td>Brass, T=020mm</td></tr><tr><td>Terminal(-)</td><td>Brass, T=040mm</td></tr><tr><td>Plating</td><td>Sn Plating</td></tr></table>                                  |   |       |          |                |           |               |                                                        | Item                                                                                                                                                                                                                                                   | Specification                                                                                                                                               | Housing            | Pa66, Ul94v-0, Black | Terminal(+)           | Brass, T=020mm | Terminal(-)        | Brass, T=040mm        | Plating               | Sn Plating  | B |
| Item                  | Specification                                                                                                                                                                                                                                                                                                              |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Housing               | Pa66, Ul94v-0, Black                                                                                                                                                                                                                                                                                                       |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Terminal(+)           | Brass, T=020mm                                                                                                                                                                                                                                                                                                             |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Terminal(-)           | Brass, T=040mm                                                                                                                                                                                                                                                                                                             |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Plating               | Sn Plating                                                                                                                                                                                                                                                                                                                 |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| C                     | <div>Electrical</div> <table><tr><th>Parameter</th><th>Value</th></tr><tr><td>Contact Resistance</td><td>30mΩ MAX</td></tr><tr><td>Insulation Resistance</td><td>1000mΩ MIN</td></tr><tr><td>Dielectric Voltage</td><td>500V AC ONE Sec Level</td></tr><tr><td>Operating Temperature</td><td>-25°C~+85°C</td></tr></table> |   |       |          |                |           |               |                                                        | Parameter                                                                                                                                                                                                                                              | Value                                                                                                                                                       | Contact Resistance | 30mΩ MAX             | Insulation Resistance | 1000mΩ MIN     | Dielectric Voltage | 500V AC ONE Sec Level | Operating Temperature | -25°C~+85°C | C |
| Parameter             | Value                                                                                                                                                                                                                                                                                                                      |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Contact Resistance    | 30mΩ MAX                                                                                                                                                                                                                                                                                                                   |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Insulation Resistance | 1000mΩ MIN                                                                                                                                                                                                                                                                                                                 |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Dielectric Voltage    | 500V AC ONE Sec Level                                                                                                                                                                                                                                                                                                      |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| Operating Temperature | -25°C~+85°C                                                                                                                                                                                                                                                                                                                |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| D                     |                                                                                                                                                                                                                                                                                                                            |   |       |          |                |           |               |                                                        | D                                                                                                                                                                                                                                                      |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| E                     | <div>Order Information</div> <div>RHTEYR2032-01</div> <table><tr><th>Code</th><th>Description</th></tr><tr><td>CR2032</td><td>Coin Battery Holder</td></tr><tr><td>01</td><td>Part Number</td></tr></table>                                                                                                                |   |       |          |                |           |               |                                                        | Code                                                                                                                                                                                                                                                   | Description                                                                                                                                                 | CR2032             | Coin Battery Holder  | 01                    | Part Number    | E                  |                       |                       |             |   |
| Code                  | Description                                                                                                                                                                                                                                                                                                                |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| CR2032                | Coin Battery Holder                                                                                                                                                                                                                                                                                                        |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| 01                    | Part Number                                                                                                                                                                                                                                                                                                                |   |       |          |                |           |               |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| F                     |                                                                                                                                                                                                                                                                                                                            |   |       |          |                |           |               |                                                        | F                                                                                                                                                                                                                                                      |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
| G                     | <div> NINGBO RHT ELECTRONIC CO.,LTD</div>                                                                                                                                                                                                |   |       | UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN   | CR2032 DIP COIN CELL RETAINERS,<br>H8.70mm, Tin plated |                                                                                                                                                                                                                                                        | <div>THIRD ANGLE PROJECTION</div> <div></div> <div>RHTEYR2032-01</div> | G                  |                      |                       |                |                    |                       |                       |             |   |
|                       |                                                                                                                                                                                                                                                                                                                            |   | 0~3   | 3~18     | 18~50          | 50~120    | CHK'D BY FENG |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
|                       |                                                                                                                                                                                                                                                                                                                            |   | ±0.12 | ±0.15    | ±0.3           | ±0.5      | APPR BY ZHAN  |                                                        |                                                                                                                                                                                                                                                        |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |
|                       | 1                                                                                                                                                                                                                                                                                                                          | 2 | 3     | 4        | 5              | 6         | 7             | 8                                                      | 9                                                                                                                                                                                                                                                      |                                                                                                                                                             |                    |                      |                       |                |                    |                       |                       |             |   |

|   |                                                                                                                                                                                                                                                                                                                                                          |   |       |          |                                                                                                                                                                                                                                                               |           |               |                                                     |   |                                                                                                                                                 |   |
|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|-------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------------|-----------------------------------------------------|---|-------------------------------------------------------------------------------------------------------------------------------------------------|---|
|   | 1                                                                                                                                                                                                                                                                                                                                                        | 2 | 3     | 4        | 5                                                                                                                                                                                                                                                             | 6         | 7             | 8                                                   | 9 |                                                                                                                                                 |   |
| A | <div><div></div><div><h3>Important Notice</h3><p>The following terms and conditions apply to all products supplied and marketed by NINGBO RHT ELECTRONIC CO., LTD.</p></div></div> |   |       |          |                                                                                                                                                                                                                                                               |           |               |                                                     |   | A                                                                                                                                               |   |
| B | <h4>1. General Statement</h4> <p>RHT connectors are designed and manufactured in accordance with international quality management standards and internal control procedures to ensure stable electrical and mechanical performance under specified operating conditions.</p>                                                                             |   |       |          | <h4>4. Compliance and Quality Assurance</h4> <p>All products comply with applicable RoHS environmental directives. Quality inspections are performed according to RHT internal standards. Upon request, relevant inspection reports may be provided.</p>      |           |               |                                                     |   | B                                                                                                                                               |   |
| C | <h4>2. Scope of Application</h4> <p>Products are intended for general electronic and industrial applications. For safety-critical systems including but not limited to medical devices, automotive safety systems, aerospace, railway control, nuclear facilities, or other life-support systems, prior written approval from RHT is required.</p>       |   |       |          | <h4>5. Soldering and Assembly</h4> <p>Soldering must comply with recommended RHT solder profiles. Use outside recommended processing conditions may affect product reliability and void warranty coverage.</p>                                                |           |               |                                                     |   | C                                                                                                                                               |   |
| D | <h4>3. Customer Design Responsibility</h4> <p>The responsibility for product selection, validation, and suitability in a specific customer application remains solely with the customer. Customers must perform adequate verification testing, reliability evaluation, and risk assessment before mass production release.</p>                           |   |       |          | <h4>6. Storage and Handling</h4> <p>Products should be stored in original sealed packaging under dry conditions. Recommended shelf life is 12 months from production date. Mechanical stress, improper handling, or contamination may affect performance.</p> |           |               |                                                     |   | D                                                                                                                                               |   |
| E |                                                                                                                                                                                                                                                                                                                                                          |   |       |          | <h4>7. Cleaning and Chemical Exposure</h4> <p>Cleaning agents must be compatible with connector housing and plating materials. Immersion cleaning is not recommended unless specifically validated by the customer.</p>                                       |           |               |                                                     |   | E                                                                                                                                               |   |
| F |                                                                                                                                                                                                                                                                                                                                                          |   |       |          |                                                                                                                                                                                                                                                               |           |               |                                                     |   | F                                                                                                                                               |   |
| G | <div> NINGBO RHT ELECTRONIC CO.,LTD</div>                                                                                                                                                                                                                              |   |       | UNITS:mm | SHEET SIZE: A4                                                                                                                                                                                                                                                | SCALE:--- | DRWN BY PAN   | CR2032 DIP COIN CELL RETAINERS, H8.70mm, Tin plated |   | <div>THIRD ANGLE PROJECTION</div> <div>RHTEYR2032-01</div> | G |
|   |                                                                                                                                                                                                                                                                                                                                                          |   | 0~3   | 3~18     | 18~50                                                                                                                                                                                                                                                         | 50~120    | CHK'D BY FENG |                                                     |   |                                                                                                                                                 |   |
|   |                                                                                                                                                                                                                                                                                                                                                          |   | ±0.12 | ±0.15    | ±0.3                                                                                                                                                                                                                                                          | ±0.5      | APPR BY ZHAN  |                                                     |   |                                                                                                                                                 |   |
|   | 1                                                                                                                                                                                                                                                                                                                                                        | 2 | 3     | 4        | 5                                                                                                                                                                                                                                                             | 6         | 7             | 8                                                   | 9 |                                                                                                                                                 |   |