
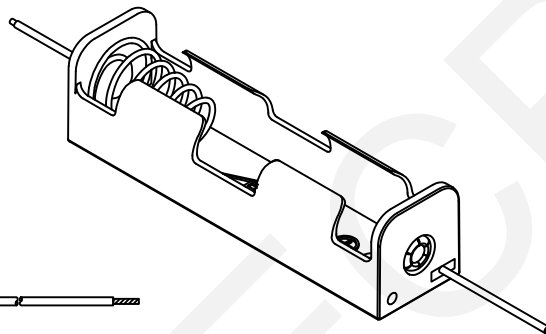


RoHS Compliance

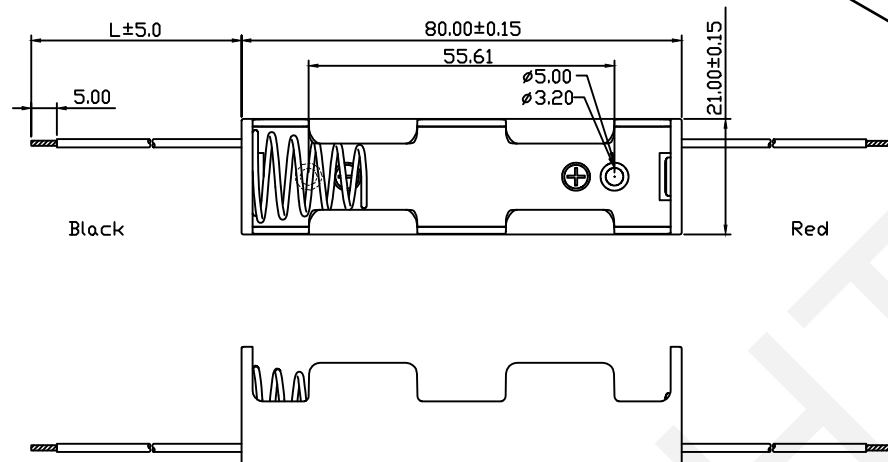

MATERIAL

Insulator:PP,Black,UL94HB

Contact:0.8x1.0mm, 65C Steel

Spring,Nickel Plated

WIRE:22AWG,Red/Black PVC

Rivet:Brass,Nickel Plated

Temperature Range:-10℃~+80℃

ORDER INFORMATION:

RE-BH-18650-001-BLXXX

1Li-ion 18650 Battery Holder

B:With WIRE(22AWG)

XXX: Cable Long



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

18650X1 BATTERY HOLDER 150MM LEADS ROHS

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RE-BH-18650-001-BLXXX

±0.12




±0.15

±0.3




±0.5

APPR BY ZHAN

RoHS Compliance

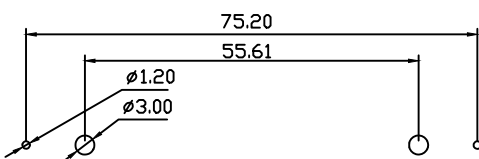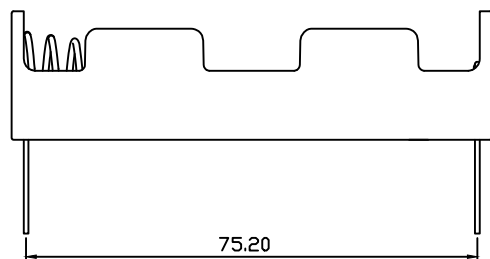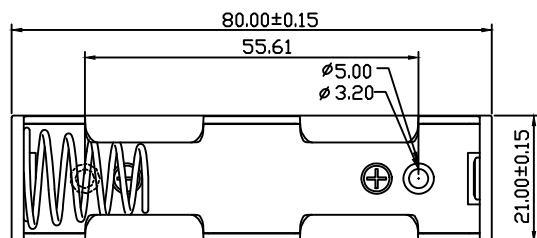

RECOMMENDED PCB LAYOUT
TOLRANCE:±0.05

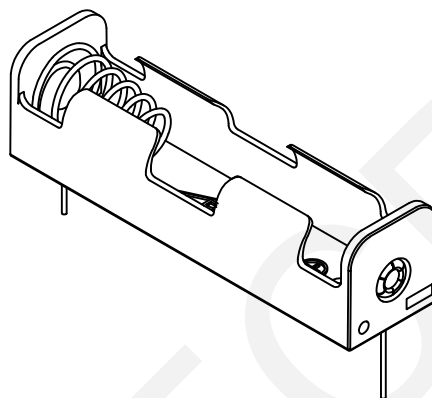

MATERIAL

Insulator:PP,Black,UL94HB

Contact:0.8x1.0mm, 65C Steel

Spring,Nickel Plated

PC Pin:Ø0.8x28mm,Brass

Nickel Plated

Rivet:Brass,Nickel Plated

Temperature Range:-10℃~+80℃

ORDER INFORMATION:

RE-BH-18650-001-D

1Li-ion 18650 Battery Holder

D:With PC Pin

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

18650X1 BATTERY HOLDER 150MM LEADS ROHS

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RE-BH-18650-001-D

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

