

Black

Red

MATERIAL

Insulator:ABS,Black,UL94HB

Contact:304 Stainless Steel Spring
Temper,Nickel plated



ORDER INFORMATION:

RHTEY18650-006-B L XXX

1 Li-ion 18650 Battery Holder

B : with WIRE(22AWG)

XXX: Cable Long

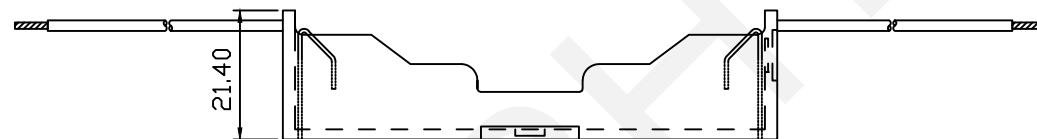

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1 Li-ion 18650 Battery Holder,with WIRE

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15





±0.3

±0.5

APPR BY ZHAN



RHTEY18650-006-BLXXX

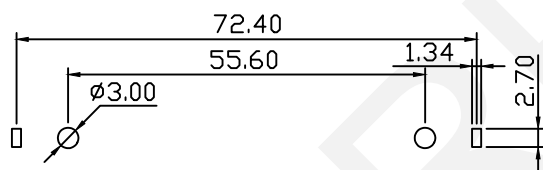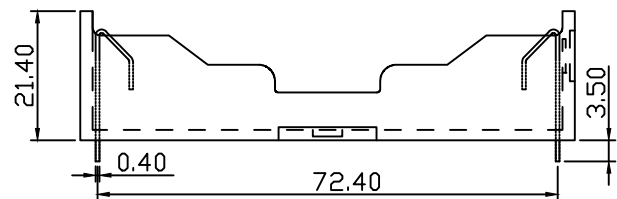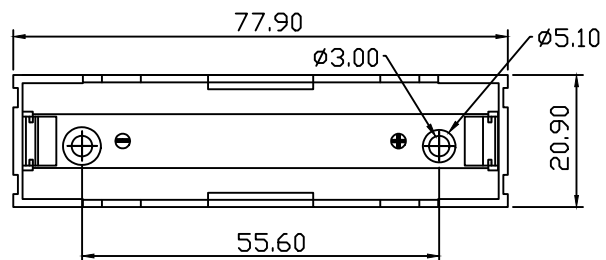

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

MATERIAL

Insulator:ABS,Black,UL94HB

Contact:304 Stainless Steel Spring

Temper,Nickel plated

ORDER INFORMATION:

RHTEY18650-006-D

3 Li-ion 18650 Battery Holder

D:with PC Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1 Li-ion 18650 Battery Holder,with PC Pin

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTEY18650-006-D