
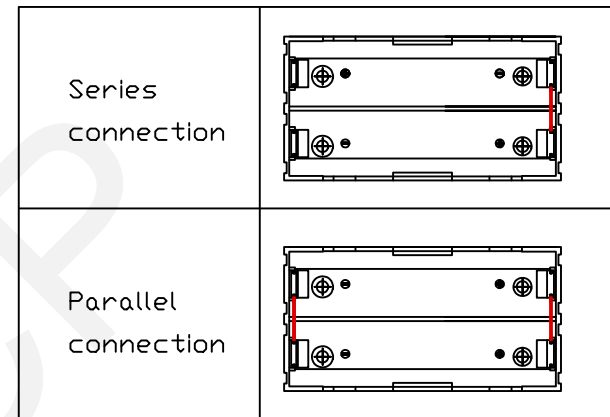

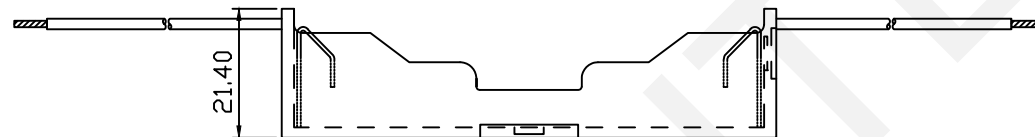


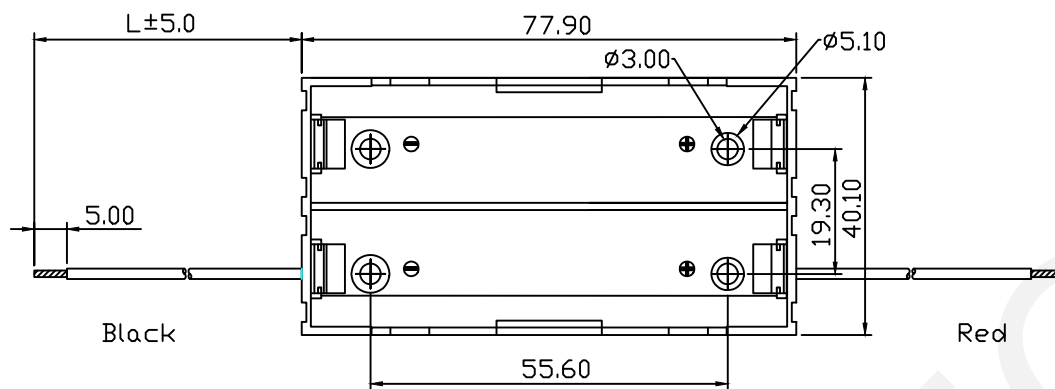

MATERIAL

Insulator: ABS, Black, UL94HB

Contact: 304 Stainless Steel Spring
Temper, Nickel plated

ORDER INFORMATION:

RHTEY18650-002-B X LXXX

2 Li-ion 18650 Battery Holder

B : with WIRE (22AWG)

Circuit : S-Series connection

P-Parallel connection

XXX: Cable Long



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2 Li-ion 18650 Battery Holder, with WIRE

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTEY18650-002-BXLXXX





± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN

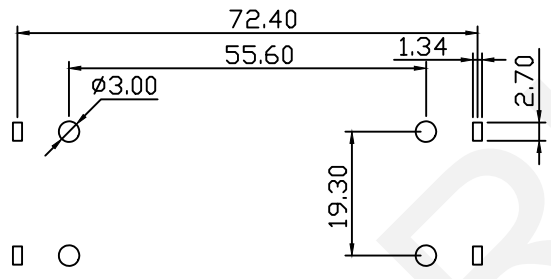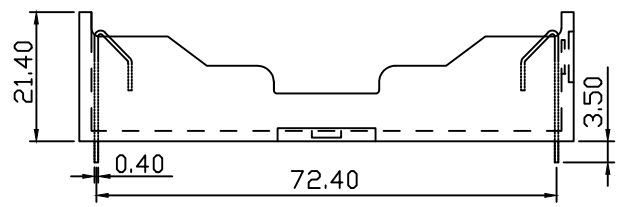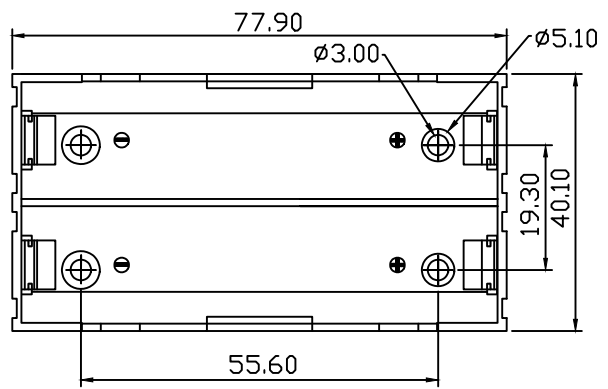

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

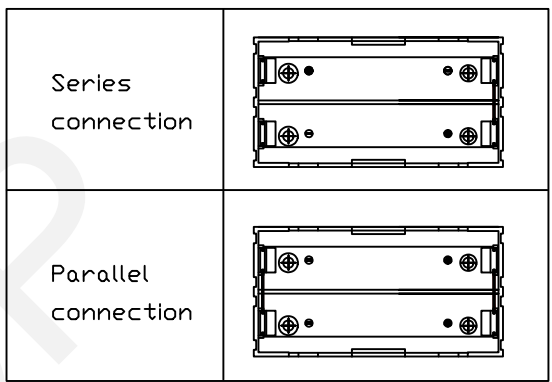

MATERIAL
Insulator:ABS,Black,UL 94HB
Contact:304 Stainless Steel Spring
Temper,Nickel plated

ORDER INFORMATION:
RHTEY18650-002-D X
2 Li-ion 18650 Battery Holder
D:with PC Pin
Circuit:S-Series connection
P-Parallel connection



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

2 Li-ion 18650 Battery Holder,with PC Pin	
THIRD ANGLE PROJECTION 	RHTEY18650-002-DX