



RHTEY011&012 Ø3.6x10 Ceramic Tube Fuse (Fast Blow)Series

RHTEY012




RHTEY011

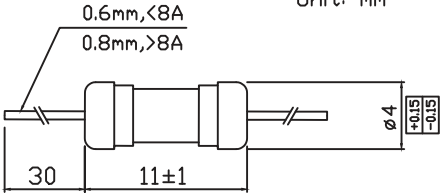

Unit: mm

I-T CHARACTERISTICS CURVE

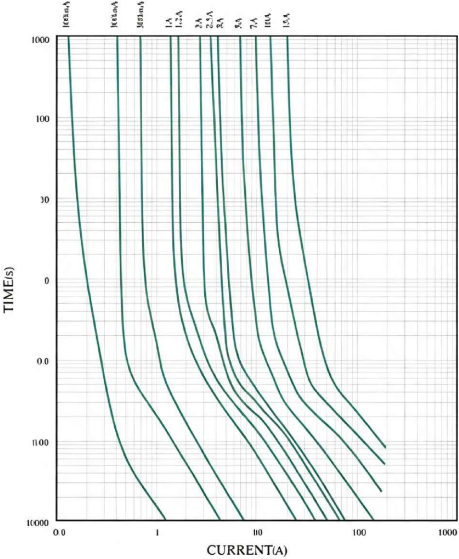

ORDER INFORMATION

Product NO.: RHTEY012-XXXX

Lead Type: 012=No Lead 011=With Lead
Rated Current _____

ELECTRICAL CHARACTERISTICS

RATING	BLOWING TIME
100%	4 hours Min
200%	60 Sec Max



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
±0.5		

DRWN BY PAN

CHK'D BY FENG


APPR BY ZHAN

3.6x10 Ceramic Tube Fuse Series

THIRD ANGLE PROJECTION



RHTEY011&RHTEY012

	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	3.6x10 Ceramic Tube Fuse Series THIRD ANGLE PROJECTION  RHTEY011&RHTEY012		
	1	2	3	4	5	6	7	8	9

Part No.	Rated Current	Rated Voltage
RHTEY012-0100	100mA	125V/250V
RHTEY012-0125	125mA	125V/250V
RHTEY012-0150	150mA	125V/250V
RHTEY012-0160	160mA	125V/250V
RHTEY012-0200	200mA	125V/250V
RHTEY012-0250	250mA	125V/250V
RHTEY012-0300	300mA	125V/250V
RHTEY012-0315	315mA	125V/250V
RHTEY012-0350	350mA	125V/250V
RHTEY012-0400	400mA	125V/250V
RHTEY012-0500	500mA	125V/250V
RHTEY012-0600	600mA	125V/250V
RHTEY012-0700	700mA	125V/250V
RHTEY012-0750	750mA	125V/250V
RHTEY012-0800	800mA	125V/250V
RHTEY012-1000	1A	125V/250V
RHTEY012-1200	1.2A	125V/250V
RHTEY012-1250	1.25A	125V/250V
RHTEY012-1500	1.5A	125V/250V
RHTEY012-1600	1.6A	125V/250V
RHTEY012-1800	1.8A	125V/250V
RHTEY012-2000	2A	125V/250V
RHTEY012-2500	2.5A	125V/250V
RHTEY012-3000	3A	125V/250V
RHTEY012-3150	3.15A	125V/250V
RHTEY012-3500	3.5A	125V/250V
RHTEY012-4000	4A	125V/250V
RHTEY012-5000	5A	125V/250V
RHTEY012-6000	6A	125V/250V
RHTEY012-6300	6.3A	125V/250V
RHTEY012-7000	7A	125V/250V
RHTEY012-8000	8A	125V/250V
RHTEY012-10000	10A	125V/250V
RHTEY012-12000	12A	125V/250V
RHTEY012-15000	15A	125V/250V

Part No.	Rated Current	Rated Voltage
RHTEY011-0100	100mA	125V/250V
RHTEY011-0115	125mA	125V/250V
RHTEY011-0150	150mA	125V/250V
RHTEY011-0160	160mA	125V/250V
RHTEY011-0200	200mA	125V/250V
RHTEY011-0250	250mA	125V/250V
RHTEY011-0300	300mA	125V/250V
RHTEY011-0315	315mA	125V/250V
RHTEY011-0350	350mA	125V/250V
RHTEY011-0400	400mA	125V/250V
RHTEY011-0500	500mA	125V/250V
RHTEY011-0600	600mA	125V/250V
RHTEY011-0700	700mA	125V/250V
RHTEY011-0750	750mA	125V/250V
RHTEY011-0800	800mA	125V/250V
RHTEY011-1000	1A	125V/250V
RHTEY011-1200	1.2A	125V/250V
RHTEY011-1250	1.25A	125V/250V
RHTEY011-1500	1.5A	125V/250V
RHTEY011-1600	1.6A	125V/250V
RHTEY011-1800	1.8A	125V/250V
RHTEY011-2000	2A	125V/250V
RHTEY011-2500	2.5A	125V/250V
RHTEY011-3000	3A	125V/250V
RHTEY011-3150	3.15A	125V/250V
RHTEY011-3500	3.5A	125V/250V
RHTEY011-4000	4A	125V/250V
RHTEY011-5000	5A	125V/250V
RHTEY011-6000	6A	125V/250V
RHTEY011-6300	6.3A	125V/250V
RHTEY011-7000	7A	125V/250V
RHTEY011-8000	8A	125V/250V
RHTEY011-10000	10A	125V/250V
RHTEY011-12000	12A	125V/250V
RHTEY011-15000	15A	125V/250V